



INDOOR LED STRIP LIGHT

MERCURY FREE



24V LED DRIVER IS REQUIRED

ACCESSORIES (SOLD SEPARATELY)

Power feed (#LED-STR-PF)



24V Hardwire Box (# LED-HWB-24V-60W)

24V 2-Wire LED Dimming Hardwire Box (# LED-HWBDIM2-24-40)


24V 3-Wire LED Dimming Hardwire Box (# LED-HWBDIM3-24-40)



LED Driver (# LED-DVR-24V-60W)



6" Flexible Connector (# LED-STR-6-BC)
(# LED-STR-12-BC)



FEATURES

- Clear anodized aluminum casing
- Slim profile design
- Even and bright light distribution
- LEDs are cool to the touch
- Long life: 50,000 hours
- 120° Viewing angle
- 4W / 12" section
- Operating temp: -30°C – 85°C (-22°F – 185°F)
- Dimmable when used with a dimming driver (not included)
- cULus listed
- For indoor use (dry location)

LINKING

- Built-in 'no shadow' link connector
- Linkable, up to 14 units (56W max.)
- Can be hardwired




Direct Linking



Linking strip lights using linking cable

COLOUR TEMPERATURES

- Warm White - 3500K(±100K)
- Neutral White - 4100K(±100K)
- Cool White - 6500K(±100K)

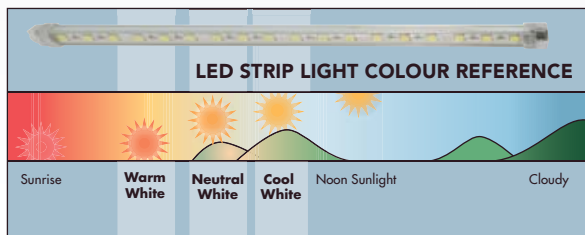

APPLICATIONS

Decoration for ceiling, wall or contour marking, undercabinet, backlight signs and showcases

ORDERING GUIDE

Part #	Description	Color Temp.	Lumen Output	Case Qty.
LED-STR-12-WW	Indoor LED Strip Light, 12" linking section	Warm White, 3500K ± 100K	180	24
LED-STR-12-NW	Indoor LED Strip Light, 12" linking section	Neutral White, 4100K ± 100K	235	24
LED-STR-12-CW	Indoor LED Strip Light, 12" linking section	Cool White, 6500K ± 100K	270	24
LED-STR-PF	Indoor LED Strip Light, Power feed			24
LED-STR-6-BC	6" Flexible Connector			24
LED-STR-12-BC	12" Flexible Connector			24
LED-HWB-24V-60W	Indoor LED Tape Light Hardwire Box, 24V 60W, with 2.1 DC Jack			24
LED-DVR-24V-60W	Indoor LED Tape Light Driver with cord & plug, 24V 60W, with 2.1 DC Jack			24
LED-HWBDIM2-24-40	2-Wire LED Dimming Driver, 24V 40W, with 2.1 DC Jack			12
LED-HWBDIM3-24-40	3-Wire LED Dimming Driver, 24V 38.4W, with 2.1 DC Jack			12



LITELINE CORPORATION
 8 Abacus Road, Brampton, Ontario, Canada L6T 5B7
 Phone Main: 416-996-1856 • Toll Free: 1-866-730-7704 • Customer Service: 905-794-2137
 Fax Main: 905-794-1990 • Toll Free: 1-888-738-9736
 E-mail Information: info@liteline.com • Sales: sales@liteline.com
 Web Website: www.liteline.com



REV052-2.22.11