

ATF7134

34W LED Track Head
Track Lighting



Job Information

Project Name	
Type	
Location	
Quantity	
Date	

Description

The ATF7134 is a 34W high powered LED track fixture specially designed for accent lighting. Available with multiple beam spreads.

Features

Body

Constructed of extruded aluminum, the body features an aesthetically pleasing smooth cylindrical shape. The body included a color matching aluminum heat sink at the back of the body in order to provide maximum heat dissipation.

Beam Spread

The fixture is available in a variety of beam angles in order to satisfy any installation requirement.

Dimming

The track fixture is dimmable when used with TRIAC dimming controls (Consult

factory for compatible dimmers).

Adjustability

Adjustable up to 180° tilt and 330° rotation to allow for spotlight into multiple directions.

LED Characteristics

High powered 34W CREE® LED chip maintains uniform intensity with a typical luminous flux up to 2295 lumens, making it a suitable replacement for 70W T4 and T6 CMH lamps; with a minimum CRI of 80. 3000 K nominal color temperature. Driver has a power factor of 0.9.

Compatibility

Fixture is provided with A-Line connector which is compatible with Juno style track. For other connector configurations (Juno, Halo, Lightolier, etc.), please contact your A-Line representative.

QuickShip In-Stock


In-Stock products ship within two business days of an order being released.*



SPECIFICATION

Application	Track
Approved Location	Dry
Beam Angle	38°
CCT	3000 K
Certification	cULus
Color	BK / WH
CRI	80 / 90
Dimming	Yes
Dimming Tech	TRIAC
Lumen Maintenance	70% @ 50,000 Hrs
Lumens	2295
Lumens per Watt	67.5
Material	Aluminum
Primary Voltage	120
Tilt	180°
Warranty	5 Years
Wattage	34

Technical Drawings

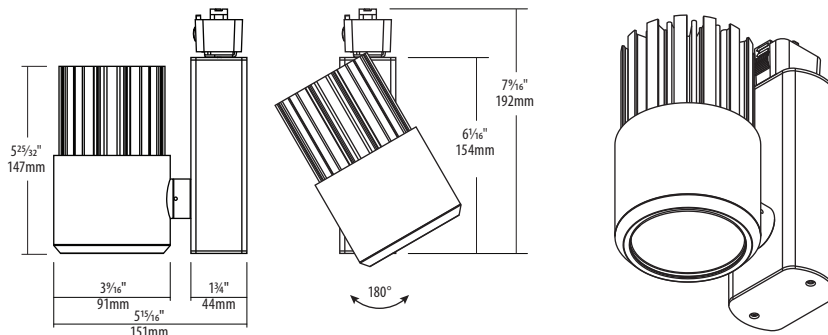

Ordering Guide

Connector Type		Color Temp.	Beam Spread	CRI	Finish Color
	- ATF7134 -				
Blank : A-Line or Juno H : Halo L : Lightolier		30 : 3000 K	38 : 38° 19 : 19° 23 : 23°	Leave blank for 80 CRI 90 : 90 CRI	BK : Black WH : White



Highlighted option denotes QuickShip.

* QuickShip option is available on orders of 100 pieces or less. QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability.


Notes: Accessories should be ordered separately. For additional options please consult your A-Line Lighting representative. Juno is a registered trademark of Juno Lighting Group. Halo is a registered trademark of Cooper Lighting. Lightolier is a registered trademark of Philips. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Photometry

ATF7134-3019 : 34W, LED Track, 19° Beam Angle

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,440.8	94.1%	97.1%
0-40	2,500.9	96.4%	99.5%
0-60	2,505.2	96.6%	99.7%
60-90	4.4	0.2%	0.2%
70-100	2.8	0.1%	0.1%
90-120	0.5	0%	0%
0-90	2,509.7	96.8%	99.9%
90-180	3.1	0.1%	0.1%
0-180	2,512.7	96.9%	100%

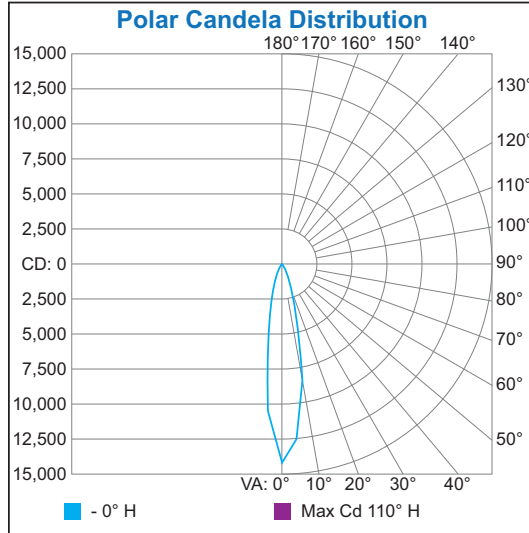

Illuminance at a Distance


	Center Beam FC	Beam Width
4.2ft	802.64 fc	1.4ft
8.3ft	200.66 fc	2.8ft
12.5ft	89.18 fc	4.3ft
16.7ft	50.17 fc	5.7ft
20.8ft	32.11 fc	7.1ft
25.0ft	22.30 fc	8.5ft

Spread: 19.4°

ATF7134-3023 : 34W, LED Track, 23° Beam Angle

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,246.2	94.9%	96.9%
0-40	2,309.9	97.1%	99.7%
0-60	2,312.3	97.2%	99.8%
60-90	1.9	0.1%	0.1%
70-100	1.3	0.1%	0.1%
90-120	0.4	0%	0%
0-90	2,314.2	97.3%	99.9%
90-180	2.7	0.1%	0.1%
0-180	2,316.9	97.4%	100%

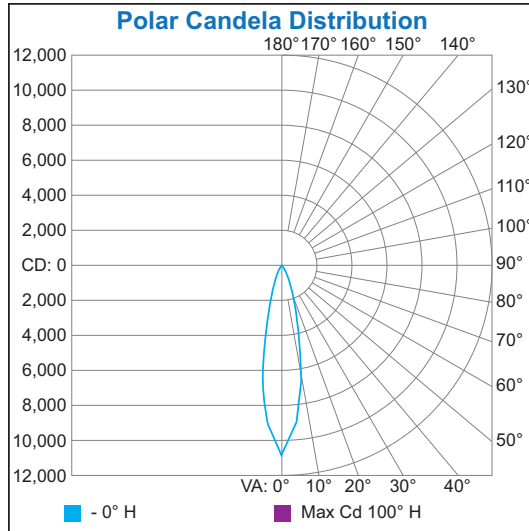

Illuminance at a Distance


	Center Beam FC	Beam Width
4.2ft	614.06 fc	1.7ft
8.3ft	153.51 fc	3.4ft
12.5ft	68.23 fc	5.0ft
16.7ft	38.38 fc	6.7ft
20.8ft	24.56 fc	8.4ft
25.0ft	17.06 fc	10.1ft

Spread: 22.8°

ATF7134-3038 : 34W, LED Track, 38° Beam Angle

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,184.1	93.9%	95.2%
0-40	2,286.7	98.3%	99.6%
0-60	2,291.0	98.5%	99.8%
60-90	1.5	0.1%	0.1%
70-100	0.9	0%	0%
90-120	0.5	0%	0%
0-90	2,292.4	98.5%	99.9%
90-180	2.8	0.1%	0.1%
0-180	2,295.3	98.7%	100%

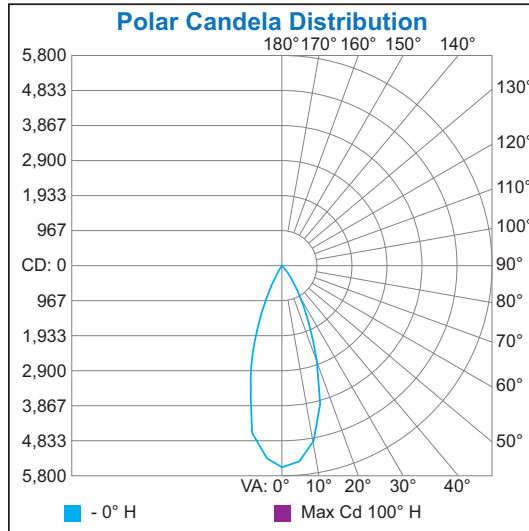

Illuminance at a Distance

	Center Beam FC	Beam Width
4.2ft	321.96 fc	2.9ft
8.3ft	80.49 fc	5.7ft
12.5ft	35.77 fc	8.6ft
16.7ft	20.12 fc	11.4ft
20.8ft	12.88 fc	14.3ft
25.0ft	8.94 fc	17.1ft

Spread: 37.8°