

SKYE

4", 705-1165 Lumens, 9-16W, Color Selectable
Recessed Downlighting

| Job Information | | |
|-----------------|--|------|
| Project Name | | Type |
| Location | | |
| Quantity | | Date |
| Contact/Phone | | |
| Notes | | |

Features

Body

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Includes White interchangeable magnetic trim.

LED Characteristics

This general application light fixture features a 9, 12 or 16 watt LED module that maintains uniform intensity producing up to 1165 lumens; with a typical CRI of 95. Available with front facing 5 step color selectable switch (2700 K, 3000 K, 3500 K, 4000 K and 5000 K).

Dimming

100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers. For compatible dimmers, visit www.liteline.com/SKYEedimmers.

Beam Spread

The fixture lens provides 75° beam spread.

Mounting

Includes two spring loaded clips to attached to any ceiling material.

LED Driver

Extruded aluminum hardwire box with 210mA, 300mA or 370mA dimmable class II electronic LED driver with 100-135V AC input. Includes an 18" plenum rated FT6 wire with DC 2.1 connector from driver to fixture.

Quick Connect push-in terminals

"Quick connect" push-in terminals for fast and easy wiring.

Start Up Temperature

-40°C (-40°F)

Environment

- Suitable for wet locations.
- Suitable for outdoor applications.
- Suitable for insulated ceiling applications.

Note

Tested with insulation up to R60 VBE recommended in spray foam and loose fill applications

| SPECIFICATION | |
|----------------------|--|
| Application | Ceiling Recessed Mount |
| Approved Location | Wet / Outdoor / Insulated Ceilings |
| Beam Angle | 75° |
| CCT | 2700 K / 3000 K / 3500 K / 4000 K / 5000 K |
| Certification | cETLus |
| Standard Metal Trim | BK / BN / OB / WH |
| Select Trims | See page 2 |
| CRI | 95 |
| Dimming | Yes |
| Dimming Tech | Forward/Reverse phase /TRIAC/ELV |
| Energy Star | Yes |
| Hole Cut | Ø 4 1/4" (108mm) |
| Input | 100-135V AC, 60Hz |
| LM79 | Yes |
| LM80 | Yes |
| Lumens | Up to 1165 |
| Lumens per Watt | Up to 90 |
| Min. Operating Temp. | -40°C (-40°F) |
| Power Factor | 0.95 |
| Projected Life | 70% @ 50,000 hrs |
| Title 24 | JA8 (up to 4000 K) |
| Warranty | Lifetime |
| Wattage | 9W / 12W / 16W |


| CCT | Lumens | | |
|--------|--------|-----|------|
| | 9W | 12W | 16W |
| 2700 K | 745 | 900 | 1040 |
| 3000 K | 785 | 915 | 1135 |
| 3500 K | 800 | 960 | 1205 |
| 4000 K | 805 | 975 | 1205 |
| 5000 K | 785 | 980 | 1145 |



Description

SKYE is a high-performance, easy to install residential and commercial downlight solution that offers good light output, energy-efficiency and streamlined design with interchangeable color trims and color selectable switch. Suitable for wet locations.

SKYE Select dead-front trims available to provide a 2-tone professional trim and baffle finish.

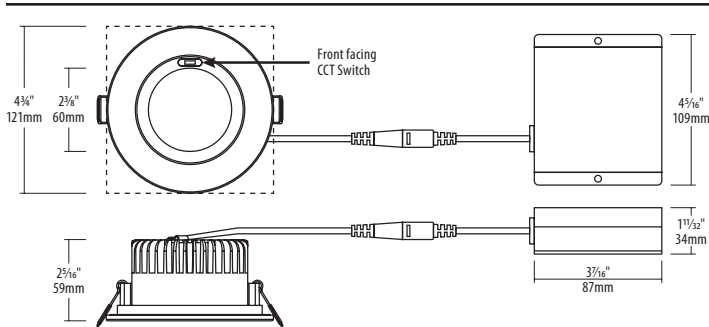

Ordering Guide

| Shape | Wattage | Driver Options | Trim Finish | Baffle Finish |
|-----------------------|---|--|---|-------------------------------|
| SLMB4 | W-CCT- | | | |
| Leave blank for Round | 12: 12 watt 9: 9 watt 16: 16 watt | Leave blank for standard 120V driver P: 120-277V, Commercial, 0-10V C: 120-347V, 0-10V EM: Emergency Backup, 120-277V, 0-10V E: Lutron Hi-Lume 1% EcoSystem w/Soft-on, Fade-to-Black | BK: Black BN: Brushed Nickel OB: Oil Rubbed Bronze WH: White | Leave blank (will match trim) |



Notes:

¹ Not available with BK Trim Finish. ² Not available with WH Trim Finish. ³ Not available for SLMB4S-12W-CCT-BKBK. ⁴ Not available for SKYE SELECT models.

* QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability. Accessories are sold separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

SKYSELECT Dead-front

Leave blank for Round
S: Square

Select from above

BK: Black
WH: White

BG: Gold
BK: Black²
SP: Specular
SS: Semi-specular
WH: White¹

Accessories



SLMB4-12W-RT-BK
Magnetic trim for 4" SKYE fixtures, round, black.



SLMB4-12W-RT-BN
Magnetic trim for 4" SKYE fixtures, round, brushed nickel.



SLMB4-12W-RT-OB
Magnetic trim for 4" SKYE fixtures, round, oil rubbed bronze.



P-4020
4 1/4" Round pre-mounting plate with driver attachment clip, for 4" SKYE fixtures.



P-4024
4 1/4" Pre-mounting plate for 4" SLIMLED, LUNA and SKYE fixtures, 24" long.



SLM4P-XLRING-BK
Extra large trim ring for 4" SKYE, metal, black. (O.D., 155.5mm / 6 1/8")



SLM4P-XLRING-BN
Extra large trim ring for 4" SKYE, metal, brushed nickel. (O.D., 155.5mm / 6 1/8")



SLM4P-XLRING-WH
Extra large trim ring for 4" SKYE, metal, white. (O.D., 155.5mm / 6 1/8")

SKYE SELECT



SLMB4-12W-RT-BKBG
SKYE Select trim, 4", dead front, round. Black trim with Gold baffle.



SLMB4-12W-RT-BKBK
SKYE Select trim, 4", dead front, round. Black trim with Black baffle.



SLMB4-12W-RT-BKSP
SKYE Select trim, 4", dead front, round. Black trim with Specular baffle.



SLMB4-12W-RT-BKSS
SKYE Select trim, 4", dead front, round. Black trim with Semi-specular baffle.



SLMB4-12W-RT-WHBG
SKYE Select trim, 4", dead front, round. White trim with Gold baffle.



SLMB4-12W-RT-WHSP
SKYE Select trim, 4", dead front, round. White trim with Specular baffle.



SLMB4-12W-RT-WHSS
SKYE Select trim, 4", dead front, round. White trim with Semi-specular baffle.



SLMB4-12W-RT-WHWH
SKYE Select trim, 4", dead front, round. White trim with White baffle.



SLM-60-FC
60" Flexible connector, for use with SKYE fixtures.



P-NCMK-1
Hanger bar kit. Includes hanger bars, brackets and screws.



VBE-1
Vapour barrier extender. For use in new construction applications.



VBE-2
Vapour barrier extender. For use in remodel applications.



VBE-3
Vapour barrier extender. For use in remodel applications.



VBE-5
Vapour barrier extender. For use in new construction applications.



LC-CRTL-3WAY-1
OnCloud Smart Wi-Fi 3-way switch. Suitable for 3-way or 4-way switch applications.



LC-CRTL-DIM-1
OnCloud Smart Wi-Fi dimmer. Features an ON/OFF press and a 7 level touch slider.