

AT-WALLWASH

ATTRACKT DASH WALL WASH, 5 Watt

Low-voltage Track Lighting



Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

Description

The ATTRACKT DASH WALL WASH is a LED fixture specifically crafted to deliver a wall wash lighting effect. These lighting inserts seamlessly integrate within the ATTRACKT low-voltage track lighting system, subtly enhancing the space by blending with surrounding lighting sources while ensuring minimal intrusion. It features tool-free installation and repositioning.

Features

Body

Constructed from polycarbonate, this LED fixture features a slim linear profile. A translucent PMMA lens provides diffused lighting.

Beam Spread

The fixture provides a 15 degree beam kick and an 80 degree wide beam angle.

Dimming

The track fixture is 100%-5% dimmable when used with compatible dimmable driver. See ATTRACKT System spec sheet for compatible dimmers.

LED Characteristics

LED chip maintains a uniform intensity with a typical luminous flux up to 250 lumens and a typical CRI of 93. Available in 2700 K, 3000 K and 3500 K

correlated color temperature.

Mounting

This LED fixture is a track insert designed for simplicity and convenience, featuring secure magnetic locking technology that enhances usability and offers significant savings on installation and maintenance.

Compatibility

Compatible with ATTRACKT low-voltage track lighting system.




SPECIFICATION

Approved Location	Dry / Indoor
Application	Track
Beam Spread	20° beam kick
Certification	cETLus
Color Temp.	2700 K / 3000 K / 3500 K
CRI	93
Dimmable	Yes
Lumens	Up to 250
Lumens per Watt	Up to 52
Voltage	24V DC
Wattage	5 Watt

Color Temp.	Lumens	Lm/W
2700 K	215	45
3000 K	225	47
3500 K	250	52

Technical Drawings

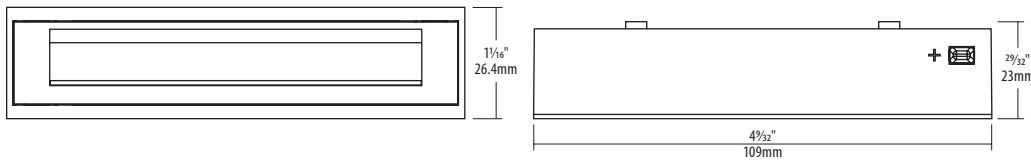

JA8
TITLE 24


Ordering Guide

AT-WALLWASH -	Color Temperature	Body Color
	<input type="text"/>	<input type="text"/>
	27 : 2700 K	BK : Black
	30 : 3000 K	WH : White
	35 : 3500 K	


Notes:

Accessories for lighting modules are sold separately. For additional options please consult your A-Line representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Photometrics

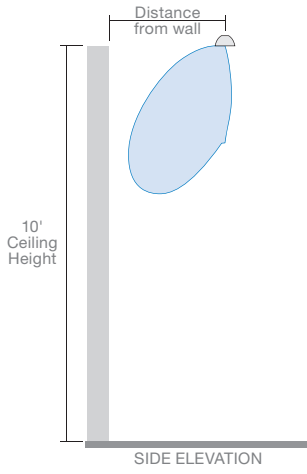


2' FROM WALL

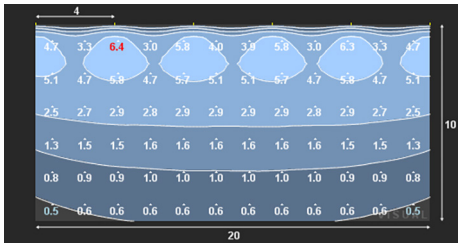


4' ON CENTER, 6 FIXTURES

3' FROM WALL

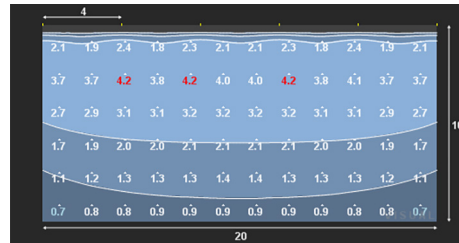

4' ON CENTER, 6 FIXTURES

4' FROM WALL

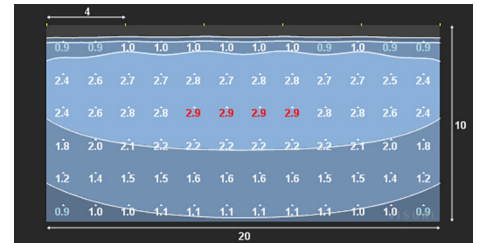

4' ON CENTER, 6 FIXTURES