A LINE

FOSSIL

Trimless Steplight

Cove, Undercabinet & Millwork Lighting

Job Information	
Project Name	
Type	
Location	
Quantity	
Date	



Description

With minimalism at its core, FOSSIL brings discreet, focused illumination. Available in four shapes with 90+ CRI, the fixture is a 6" × 8" glass fiber reinforced gypsum tile with adjustable metal brackets. Once mounted, the tile is mudded directly into the drywall, so the fixture disappears into the surface for a seamless trimless finish. FOSSIL pairs excellent light output with controlled beam angles to illuminate stair treads and hallways while blending into the architecture.

Features

Body Construction
Constructed from Glass Fiber Reinforced Gypsum, this trimless fixture features an embedded LED light and a smooth opening that provides clean and glare-free lighting. Also includes metal mounting brackets adjustable to all wall thicknesses.
NOTE: Includes 4x #6 self-drilling screws.

Power Consumption
This fixture operates on 24V DC (Refer to page 2 for driver options).

Light Output
This accent light is available in 2700 K, 3000 K and 3500 K color temperatures, providing up to 140 lumens.

Beam Spread
Refer to beam angle table.

Dimming
The LED lamp supports 100~3% dimmable functionality when used with a dimmable driver.

LED Characteristics
Powered by a 2 watt LED chip that maintains uniform intensity with 70% lumens at 50,000 hours average life; with a minimum CRI of 90+.
NOTE: Tile light can be removed for servicing (once plaster tile is mudded in place). See accessory CTLR2-REMOVAL-TOOLV2.

Linking
Each fixture provided with 22 AWG 2-SPL wire for hardwiring to other fixtures and driver. Use wire type and gauge suitable for application to connect the fixtures.


SPECIFICATION	
Approved Location	Indoor, Damp
CCT	2700 K / 3000 K / 3500 K
CRI	90+
Dimming	Yes
Dimming Tech	Voltage Reduction
Input	24V DC
Lumens	Up to 140
Lumens per Watt	Up to 70
Power Supply	Constant Voltage
Projected Life	70% @ 50,000 hrs
Warranty	1-Year
Wattage	2W

CCT	Lumens
2700 K	125
3000 K	130
3500 K	140

Opening Style	Beam Angle
L	27°
O	32°
Q	28°
S	25°

IC RATED

Technical Drawings

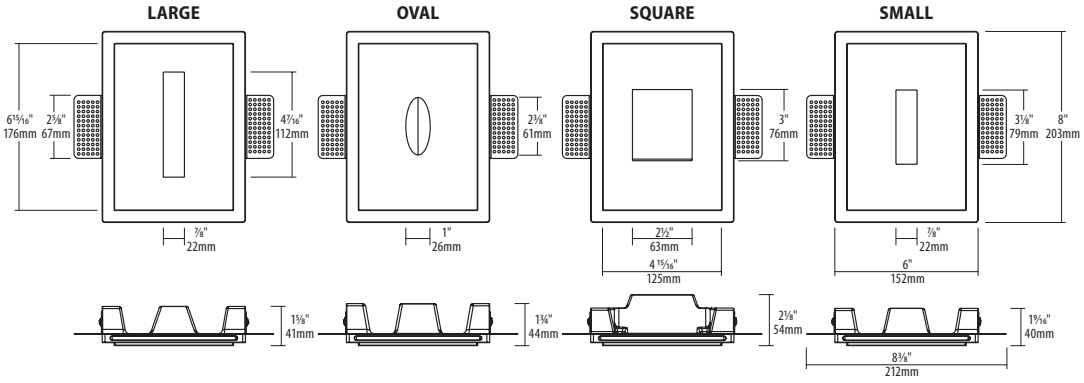

Ordering Guide

	Opening Style		CCT
FSL3-GYP -	[ ]	- 2W	[ ]
	L : Large O : Oval Q : Square S : Small		27K : 2700 K 30K : 3000 K 35K : 3500 K

QUICKSHIP 7-DAY

Highlighted option denotes QuickShip.

Notes:

QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability.

Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Liteline Corporation

Copyright © 2026
All rights reserved.

Telephone
416.996.1856
1.866.730.7704

Fax
905.709.5255
1.888.738.9736

LITELINE.COM

Compatible Drivers

OnCloud

OnCloud Driver Kit



OC-HWB-60WFSL-1C
100-240VAC, 60W, 1-Channel 24VDC OnCloud driver kit, powers and controls wireless dimming and on/off capability through WiZ app, Room Controller and smart speakers.

OnCloud Adapter



LC-DVR-CV96W1FSL-1C
24V, 1-Channel OnCloud adapter, controls dimming and on/off capability through WiZ app, Room Controller and smart speakers.

Power feed required



LED-HWB-DC21-6-PF2
DC 2.1 to bare leads power feed.
Maximum 10' to first fixture.
* Power feed required for all drivers with DC 2.1 jack.

Non Dimming Class II

Hardwire Drivers



LED-HWB-24V-24W
LED 24V, 24W Hard wire Box LED Driver with DC 2.1 jack.

LED-HWB-24V-36W
LED 24V, 36W Hard wire Box LED Driver with DC 2.1 jack.

LED-HWB-24V-60W
LED 24V, 60W Hard wire Box LED Driver with DC 2.1 jack.



LED-HWB-24V-100W
LED 24V, 96W Hard wire Box LED Driver.

Power feed required



LED-HWB-DC21-6-PF2
DC 2.1 to bare leads power feed.
Maximum 15' to first fixture.
* Power feed required for all drivers with DC 2.1 jack.

Dimming Class II

Electronic Hardwire Drivers – DC 2.1 – Powered by Lutron®



LED-HWBDIM3-24-40
40W LED dimmable hardwire driver with DC 2.1 jack. 3-wire, 24V, powered by Lutron® Hi-lume® 1% Ecosystem/3-wire LED driver.



HWB-DIM-CDC-24V-30W†
30W dimmable class 2 power supply, 24V.



HWB-DIM-CDC-24V-60W†
60W dimmable class 2 power supply, 24V.



HWB-DIM-CDC-24V-96W†
96W dimmable class 2 power supply, 24V.

† For TRIAC/ELV dimmers, set the internal dimming dip switch to VR. For 0-10V dimmers, set to PWM.

Power feed required



LED-HWB-DC21-6-PF2
DC 2.1 to bare leads power feed.
Maximum 10' to first fixture.
* Power feed required for all drivers with DC 2.1 jack.

Accessories



LED-SP-4
Optional harness for up to 4 runs, 24V.



CTLR2-REMOVAL-TOOLV2
Removal tool for FOSSIL lights.



LC-CRTL-3WAY-1
OnCloud Smart Wi-Fi 3-Way Switch.
Compatible with WiZ App.



LC-CRTL-DIM
OnCloud Smart Wi-Fi Dimmer, 120V.
Compatible with WiZ App.