

Light efficiency:

101 Lumen/Watt


Color temperature:

5217 K

Light quality:

CRI:93.0, R_g:89.7, R_f:100.8**P: 2 / V: - / F: 3****Output: 1207 lm****Peak: 1943 cd****Power: 11.9 W****Voltage: 121 V****Current: 0.102 A****PF: 0.97****THD: 19.61 %**

Angular Distribution

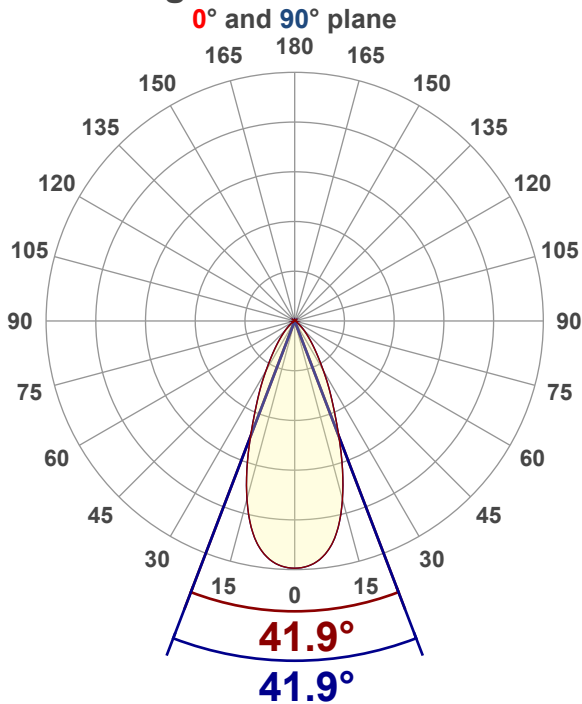

Product name:

RA35-12G-90WH - 5000K

Test Date:

12/5/2025

Beam Angle (50% of the brightness of the centre):

41.9°

Field Angle (10% of the brightness of the centre):

77.8°

Cut Off Angle (2.5% of the brightness of the centre):

102.5°

Beam Details

*measured at centre of beam

Mounting Height (feet)\(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	1307 lx	121 fc	3.1 ft / 0.9 m
8 ft / 2.4 m	327 lx	30 fc	6.1 ft / 1.9 m
12 ft / 3.7 m	145 lx	13 fc	9.2 ft / 2.8 m
16 ft / 4.9 m	82 lx	8 fc	12.3 ft / 3.7 m
20 ft / 6.1 m	52 lx	5 fc	15.3 ft / 4.7 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	895	74.15%
0-40	1075	89.06%
0-60	1185	98.18%
60-90	21.1	1.75%
70-100	7.10	0.59%
90-120	0.036	0.00%
0-90	1206	99.92%
90-180	0.494	0.04%
0-180	1207	100.00%

ISO Lux Diagram

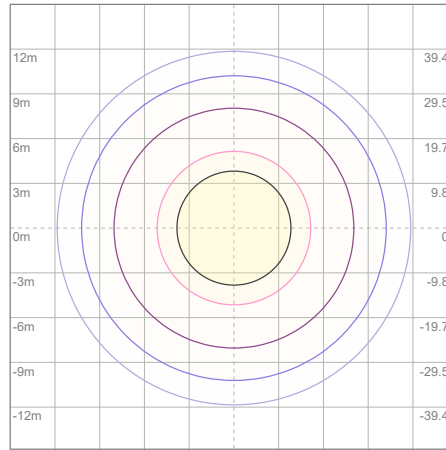

Lux at center:	209 lx
3%	6.27 lx
5%	10.45 lx
10%	20.90 lx
30%	62.70 lx
50%	104.50 lx

Conditions:
 Number of planes: 8
 Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87
3	103	96	92	88	101	95	91	87	92	89	86	90	87	84	88	85	83	81
4	98	90	85	81	96	89	84	80	87	83	79	85	82	79	83	80	78	76
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	70	77	72	69	75	72	69	67
7	85	76	70	66	83	75	70	66	74	69	65	73	68	65	72	68	65	63
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57
10	74	65	59	56	73	65	59	56	64	59	56	63	59	55	62	58	55	54


LAMPS (number of lamps)

Luminaire Budgetary Diagram




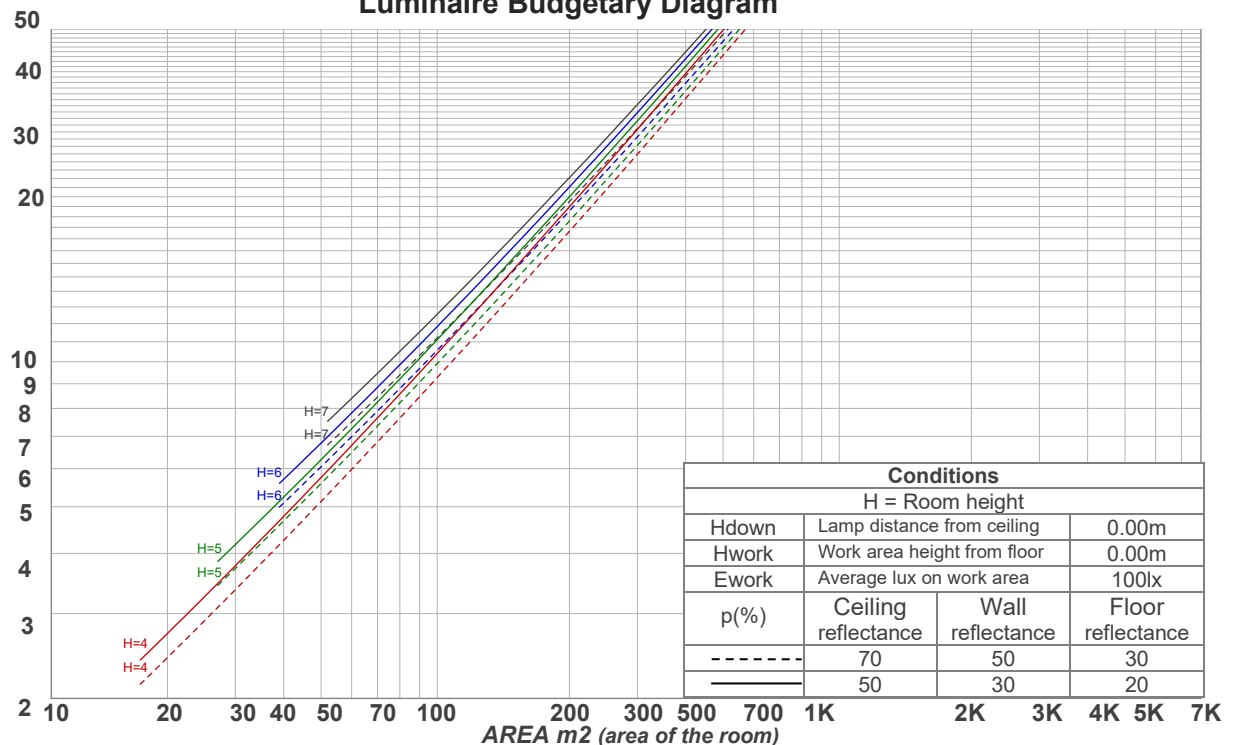


ANSI/IES TM-30-18

P: 2 / V: - / F: 3

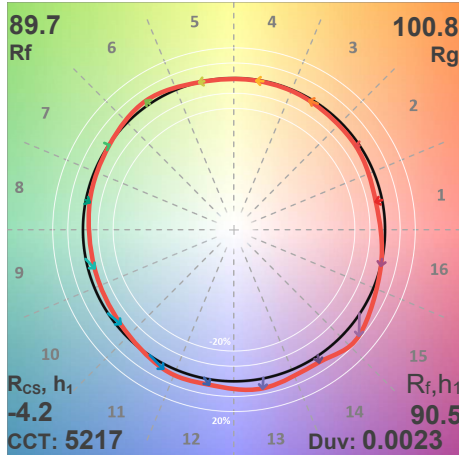

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	91	-4%	0%
2	95	-2%	1%
3	88	-1%	6%
4	90	-1%	4%
5	90	0%	3%
6	94	3%	1%
7	96	-1%	-1%
8	93	-3%	1%
9	90	-5%	7%
10	83	-3%	10%
11	80	3%	12%
12	91	4%	4%
13	91	7%	-2%
14	91	4%	-2%
15	83	8%	-12%
16	92	0%	-4%

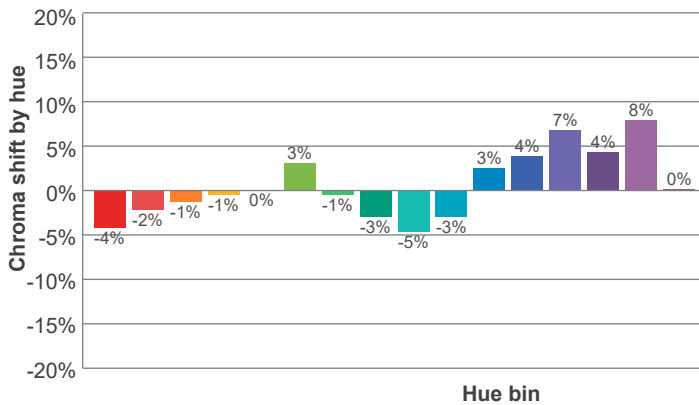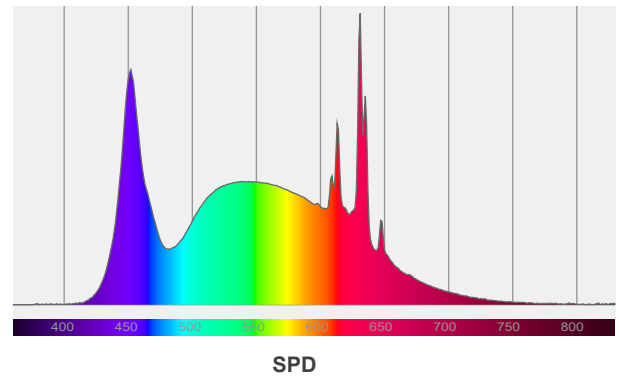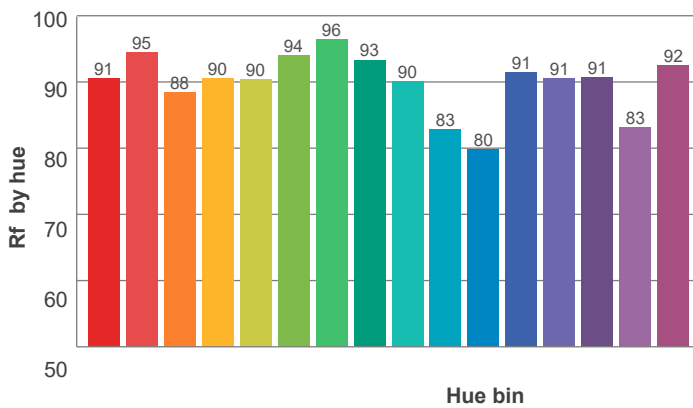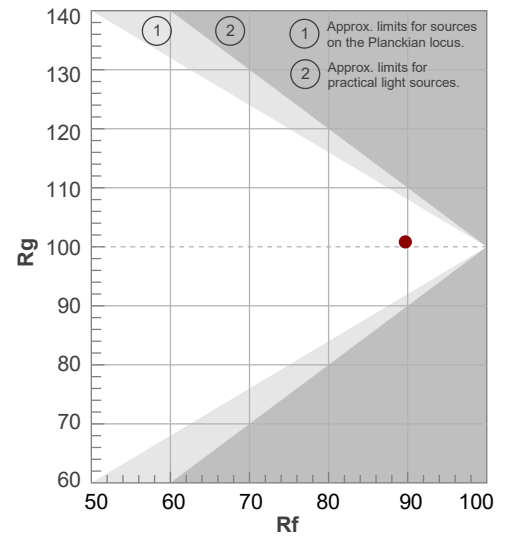


Red: 19.8%, Power=3.2mW

Blue: 18.7%, Power=12.6mW

Green: 32.8%, Power=18.1mW

UVA: 0%, Power=0.0mW

Dominant Wavelength: 581nm

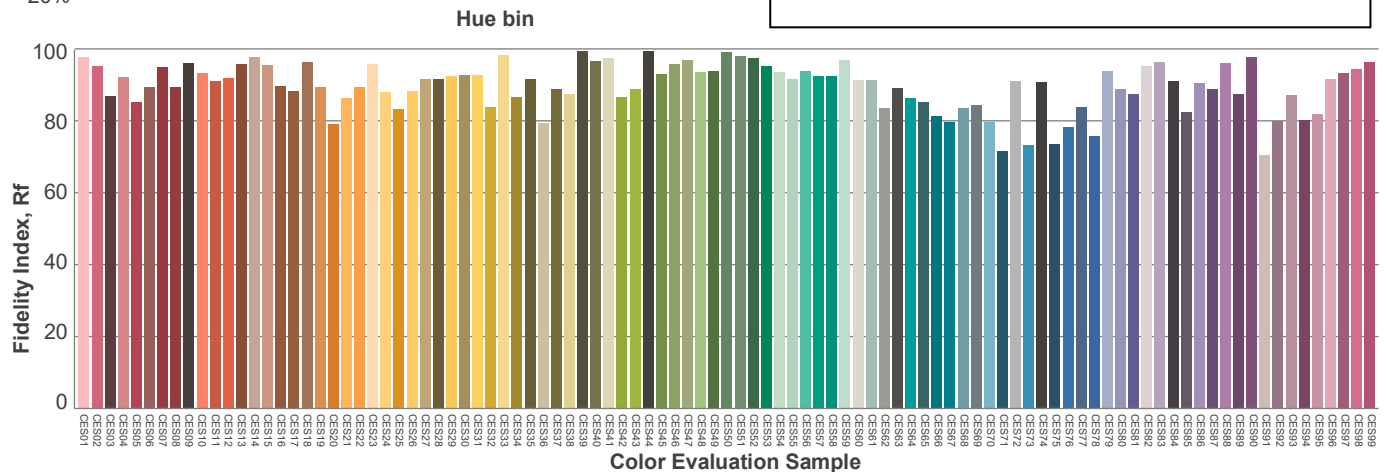1st Peak Wavelength: 631nm2nd Peak Wavelength: 452nm

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	20.2	20.8	20.3	21.0	21.2	20.2	20.8	20.3	21.0	21.2
	3H	20.1	20.9	20.5	21.1	21.2	20.1	20.9	20.5	21.1	21.2
	4H	20.1	20.9	20.5	21.1	21.3	20.1	20.9	20.5	21.1	21.3
	6H	20.2	20.8	20.5	21.1	21.4	20.2	20.8	20.5	21.1	21.4
	8H	20.1	20.7	20.5	21.0	21.4	20.1	20.7	20.5	21.0	21.4
	12H	20.1	20.6	20.4	21.0	21.4	20.1	20.6	20.4	21.0	21.4
4H	2H	19.9	20.7	20.3	20.9	21.1	19.9	20.7	20.3	20.9	21.1
	3H	20.2	20.7	20.5	21.1	21.5	20.2	20.7	20.5	21.1	21.5
	4H	20.2	20.7	20.6	21.1	21.6	20.2	20.7	20.6	21.1	21.6
	6H	20.2	20.7	20.7	21.0	21.4	20.2	20.7	20.7	21.0	21.4
	8H	20.1	20.6	20.6	21.0	21.3	20.1	20.6	20.6	21.0	21.3
	12H	20.1	20.5	20.6	20.9	21.3	20.1	20.5	20.6	20.9	21.3
8H	4H	20.1	20.6	20.6	21.0	21.3	20.1	20.6	20.6	21.0	21.3
	6H	20.1	20.5	20.6	20.9	21.5	20.1	20.5	20.6	20.9	21.5
	8H	20.1	20.4	20.7	20.9	21.6	20.1	20.4	20.7	20.9	21.6
	12H	20.1	20.3	20.7	20.8	21.4	20.1	20.3	20.7	20.8	21.4
12H	4H	20.0	20.4	20.5	20.9	21.3	20.0	20.4	20.5	20.9	21.3
	6H	20.1	20.4	20.6	20.9	21.5	20.1	20.4	20.6	20.9	21.5
	8H	20.1	20.3	20.7	20.8	21.4	20.1	20.3	20.7	20.8	21.4
Variation of the observer position for the luminaire distance S											
S = 1.0H		2.9 / -3.5					2.9 / -3.5				
S = 1.5H		5.2 / -4.5					5.2 / -4.5				
S = 2.0H		7.0 / -5.0					7.0 / -5.0				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1207 lm total luminous flux											