

Light efficiency:

100 Lumen/Watt

Color temperature:

4086 K

Light quality:

CRI:94.1, R_g:96.5, R_r:89.5

P: 2 / V: - / F: 3

Output: 2056 lm

Peak: 5977 cd

Power: 20.6 W

Voltage: 120 V


Current: 0.175 A

PF: 0.98

THD: 9.01 %



Angular Distribution

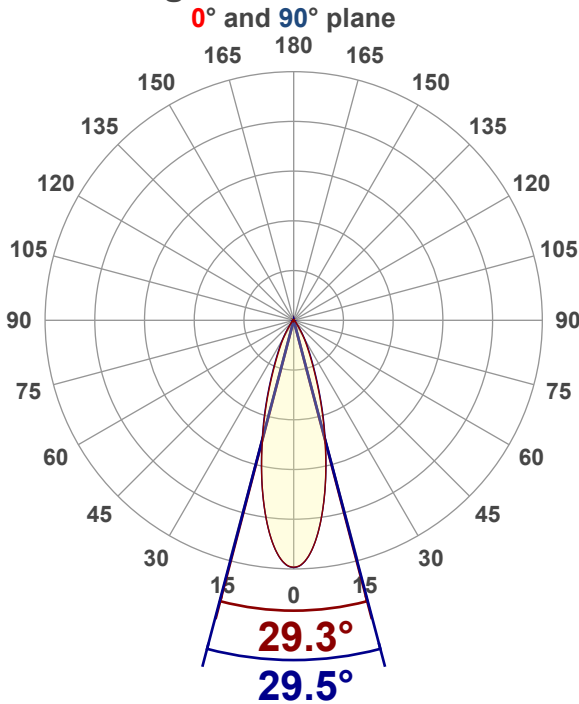

Product name:

RA35P-12CTR-N2P2SXXX

Test Date:

3/31/2026

Beam Angle (50% of the brightness of the centre):
29.4°

Field Angle (10% of the brightness of the centre):
57.9°

Cut Off Angle (2.5% of the brightness of the centre):
76.3°

Beam Details

*measured at centre of beam

Mounting Height (feet)/(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	4016 lx	373 fc	2.1 ft / 0.6 m
8 ft / 2.4 m	1004 lx	93 fc	4.2 ft / 1.3 m
12 ft / 3.7 m	446 lx	41 fc	6.3 ft / 1.9 m
16 ft / 4.9m	251 lx	23 fc	8.4 ft / 2.6 m
20 ft / 6.1m	161 lx	15 fc	10.5 ft / 3.2 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	1728	84.05%
0-40	1893	92.07%
0-60	2002	97.37%
60-90	51.1	2.49%
70-100	21.0	1.02%
90-120	0.511	0.02%
0-90	2053	99.85%
90-180	3.06	0.15%
0-180	2056	100.00%

ISO Lux Diagram

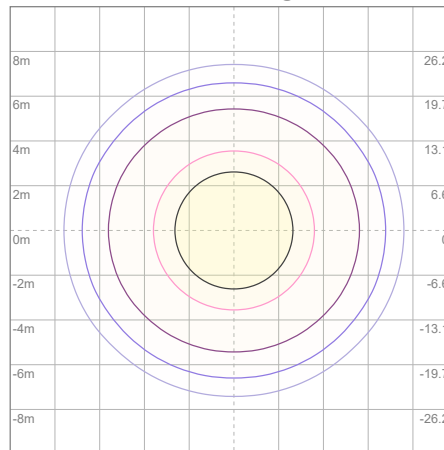

Lux at center:		642 lx
— 3%	19.26 lx	
— 5%	32.10 lx	
— 10%	64.20 lx	
— 30%	192.60 lx	
— 50%	321.00 lx	

Conditions:
 Number of planes: 8
 Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization


Ceiling reflectance	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89
3	104	99	94	91	103	97	93	90	95	91	89	92	90	87	90	88	86	84
4	100	94	89	85	99	93	88	85	90	87	84	88	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77
6	93	85	80	76	91	84	79	76	83	79	75	81	78	75	80	77	74	73
7	89	81	76	73	88	81	76	72	79	75	72	78	74	72	77	74	71	70
8	86	78	73	69	85	77	73	69	76	72	69	75	72	69	75	71	68	67
9	83	75	70	67	82	74	70	66	74	69	66	73	69	66	72	68	66	65
10	80	72	67	64	79	72	67	64	71	67	64	70	66	64	70	66	63	62

LAMPS (number of lamps)





Luminaire Budgetary Diagram

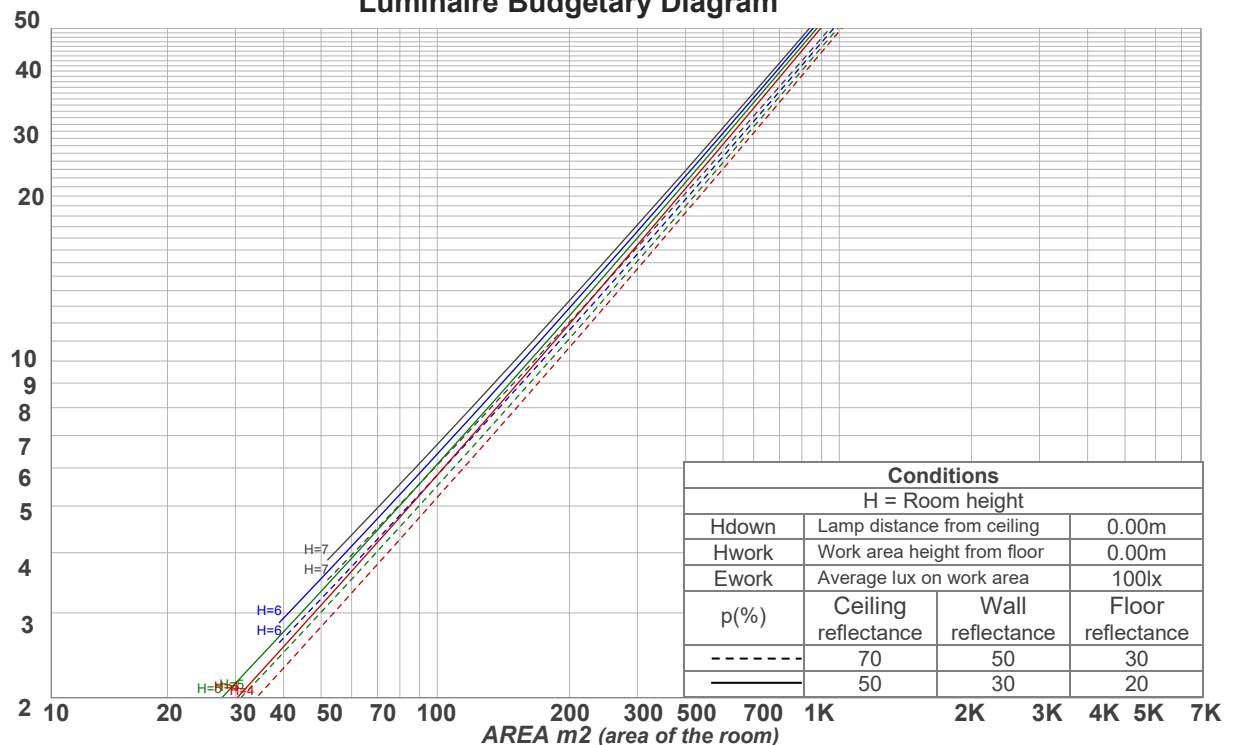


ANSI/IES TM-30-18 P: 2 / V: - / F: 3

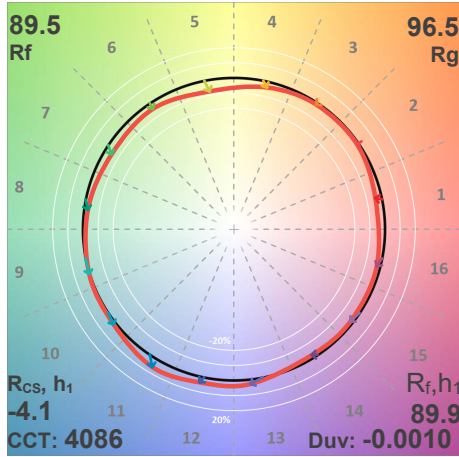

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	90	-4%	2%
2	94	-1%	1%
3	95	-1%	1%
4	91	-4%	-3%
5	89	-8%	-2%
6	93	-4%	0%
7	90	-5%	4%
8	89	-3%	7%
9	86	0%	11%
10	87	1%	9%
11	87	6%	6%
12	91	4%	-2%
13	88	3%	-9%
14	92	-2%	-3%
15	85	-2%	-8%
16	86	-2%	-6%

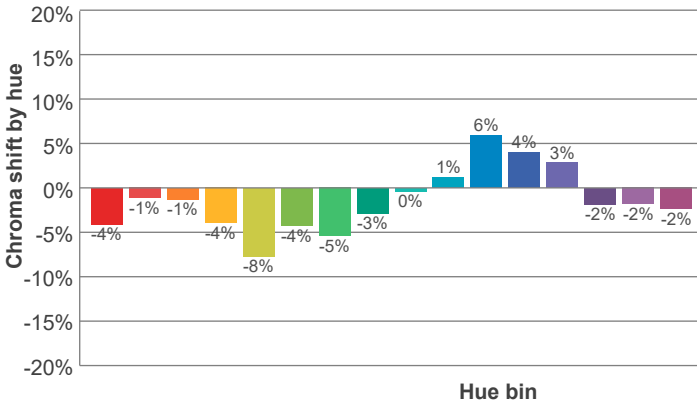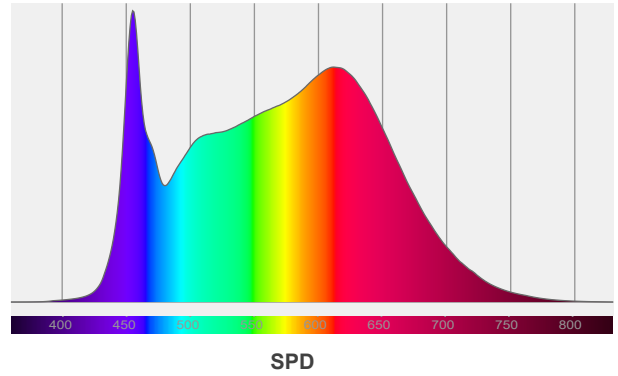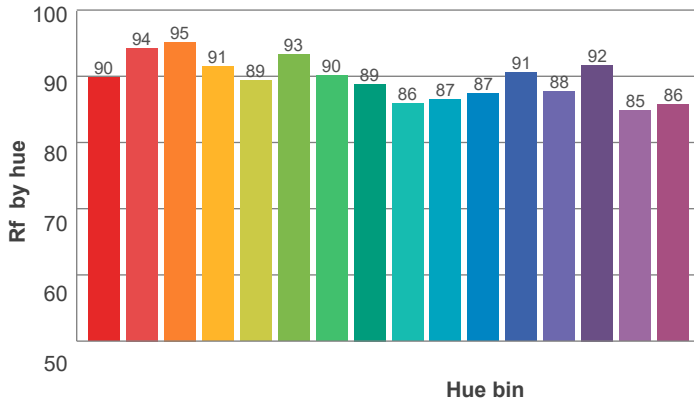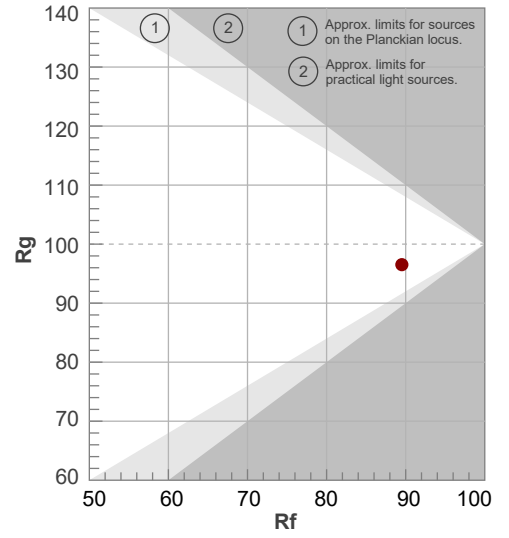

Red: 28.1%, Power=13.8mW
 Blue: 16.9%, Power=23.0mW
 Green: 28.3%, Power=26.4mW
 UVA: 0%, Power=0.0mW
 Dominant Wavelength: 582nm
 1st Peak Wavelength: 455nm
 2nd Peak Wavelength: 611nm

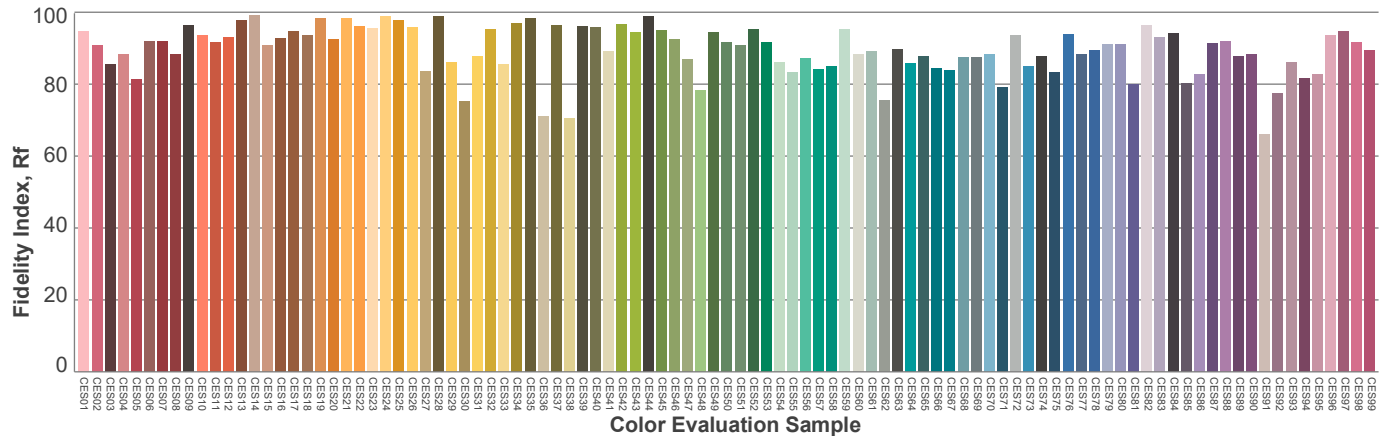

Glare Evaluation According to UGR

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

p Ceiling	70	70	50	50	30	70	70	50	50	30	
p Walls	50	30	50	30	30	50	30	50	30	30	
p Floor	20	20	20	20	20	20	20	20	20	20	
Room size H = mounting height above eye level X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	12.8	13.4	12.9	13.6	13.8	13.1	13.6	13.2	13.8	14.0
	3H	13.4	14.1	13.8	14.3	14.5	13.7	14.3	14.0	14.5	14.7
	4H	13.8	14.5	14.2	14.7	14.9	14.0	14.6	14.4	14.9	15.1
	6H	14.1	14.7	14.4	15.0	15.3	14.3	14.8	14.6	15.1	15.5
	8H	14.2	14.7	14.5	15.0	15.4	14.3	14.9	14.7	15.2	15.6
12H	14.2	14.7	14.6	15.1	15.5	14.4	14.9	14.7	15.2	15.7	
4H	2H	13.0	13.6	13.4	13.9	14.1	13.2	13.9	13.6	14.1	14.3
	3H	14.0	14.5	14.4	14.9	15.3	14.2	14.7	14.5	15.0	15.5
	4H	14.4	14.9	14.8	15.3	15.8	14.5	15.0	15.0	15.5	16.0
	6H	14.8	15.3	15.3	15.6	16.0	14.9	15.4	15.4	15.7	16.1
	8H	14.9	15.4	15.4	15.7	16.1	15.0	15.5	15.5	15.8	16.2
12H	14.9	15.3	15.4	15.7	16.2	15.0	15.4	15.5	15.8	16.3	
8H	4H	14.6	15.0	15.1	15.4	15.7	14.7	15.2	15.2	15.5	15.9
	6H	15.0	15.4	15.6	15.8	16.4	15.2	15.5	15.7	15.9	16.5
	8H	15.3	15.5	15.8	16.0	16.7	15.4	15.6	15.9	16.2	16.8
	12H	15.4	15.6	16.0	16.1	16.7	15.5	15.7	16.1	16.2	16.8
12H	4H	14.5	14.9	15.0	15.3	15.8	14.7	15.0	15.2	15.4	15.9
	6H	15.1	15.4	15.6	15.9	16.5	15.2	15.5	15.7	16.0	16.6
	8H	15.3	15.5	15.9	16.0	16.6	15.4	15.6	16.0	16.2	16.8
Variation of the observer position for the luminaire distance S											
S = 1.0H	1.5 / -0.6					1.7 / -0.7					
S = 1.5H	2.9 / -0.9					3.3 / -1.0					
S = 2.0H	4.3 / -1.2					4.7 / -1.3					
Corrected glare indices referring to 2056 lm total luminous flux											

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Please refer to our website for the latest test results.