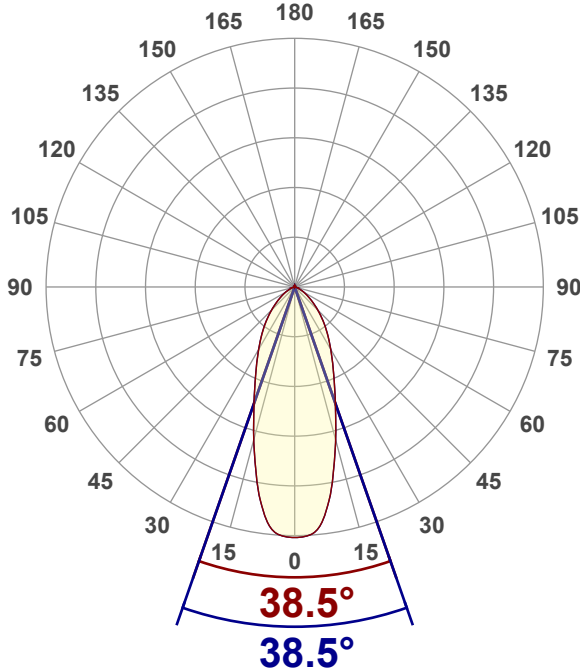


Light efficiency:**81 Lumen/Watt****Color temperature:****2880 K****Light quality:****CRI:96.2, R_g:99.1, R_f:94.2****R9: 66.3 / P: 2 / V: - / F: 2****Output: 786 lm****Peak: 1009 cd****Power: 9.7 W****Voltage: 120 V****Current: 0.087 A****PF: 0.93****THD: 38.27 %****Angular Distribution****0° and 90° plane****Product name:****RA4-10G-CCT-OJB-WH-27K****Test Date:****9/24/2026****Beam Angle (50% of the brightness of the centre):****38.5°****Field Angle (10% of the brightness of the centre):****98.4°****Cut Off Angle (2.5% of the brightness of the centre):****130.6°****Beam Details*****measured at centre of beam**

Mounting Height (feet)\(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	679 lx	63 fc	2.8 ft / 0.9 m
8 ft / 2.4 m	170 lx	16 fc	5.6 ft / 1.7 m
12 ft / 3.7 m	75 lx	7 fc	8.4 ft / 2.6 m
16 ft / 4.9 m	42 lx	4 fc	11.2 ft / 3.4 m
20 ft / 6.1 m	27 lx	3 fc	14 ft / 4.3 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	442	56.23%
0-40	588	74.81%
0-60	752	95.67%
60-90	33.2	4.22%
70-100	7.19	0.91%
90-120	0.286	0.04%
0-90	785	99.87%
90-180	1.48	0.19%
0-180	786	100.00%

ISO Lux Diagram

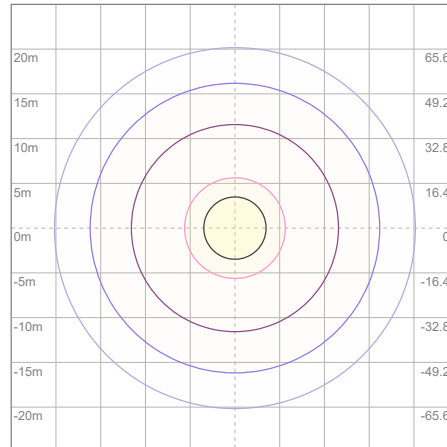

Lux at center:	109 lx
3%	3.27 lx
5%	5.45 lx
10%	10.90 lx
30%	32.70 lx
50%	54.50 lx

Conditions:

Number of planes: 8

Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75
4	93	85	78	73	91	83	78	73	81	76	72	79	75	71	77	73	70	69
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	65	63
6	83	73	66	61	81	72	66	61	70	65	61	69	64	60	68	63	60	58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	63	59	55	54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50
9	71	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47
10	67	56	50	46	66	56	50	46	55	50	46	54	49	46	54	49	45	44

LAMPS (number of lamps)


Luminaire Budgetary Diagram

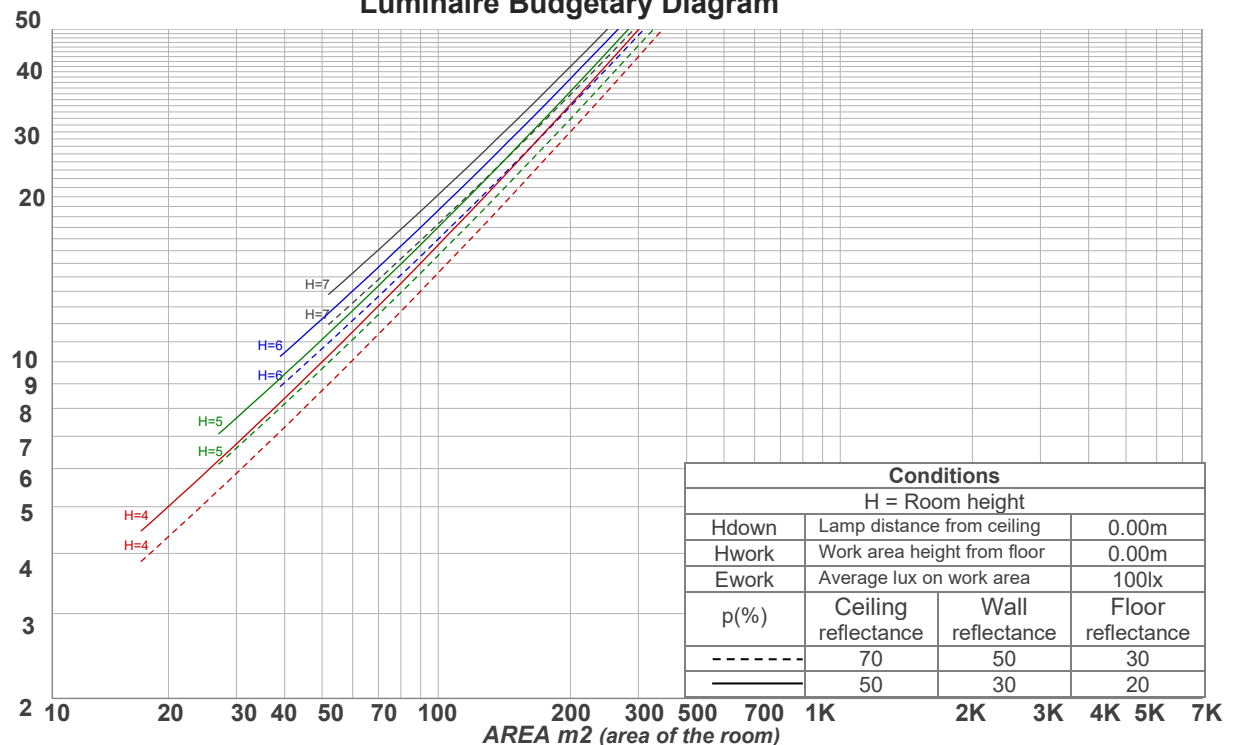





Photometric Testing Report

ANSI/IES TM-30-18

P: 2 / V: - / F: 2

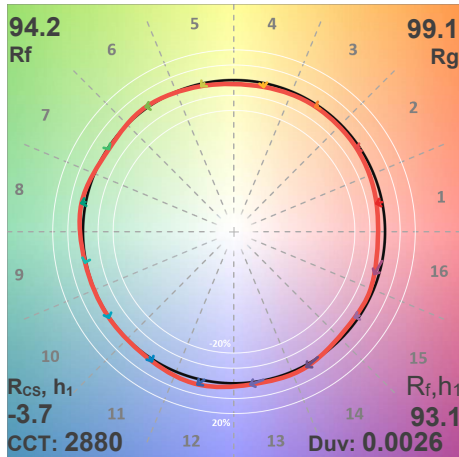

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	93	-4%	0%
2	96	-2%	0%
3	95	-1%	1%
4	96	-2%	-1%
5	96	-1%	2%
6	96	1%	3%
7	96	-1%	0%
8	96	2%	1%
9	98	0%	1%
10	97	0%	1%
11	95	1%	3%
12	90	4%	-4%
13	89	1%	-9%
14	88	1%	-10%
15	93	-2%	-3%
16	87	-3%	-9%

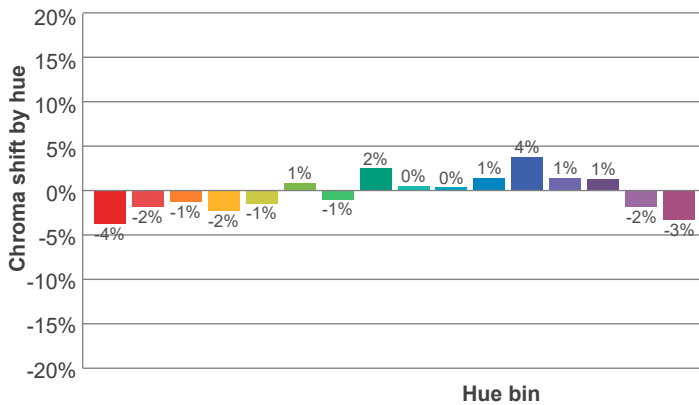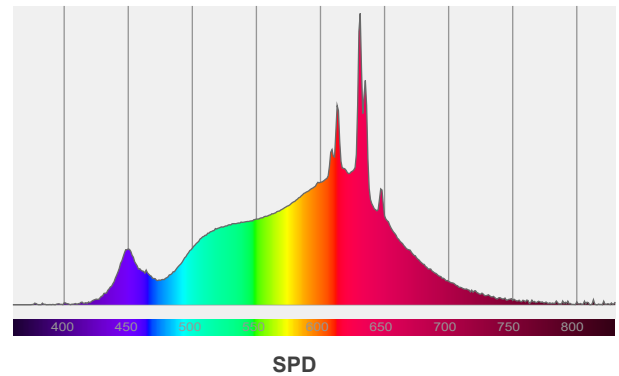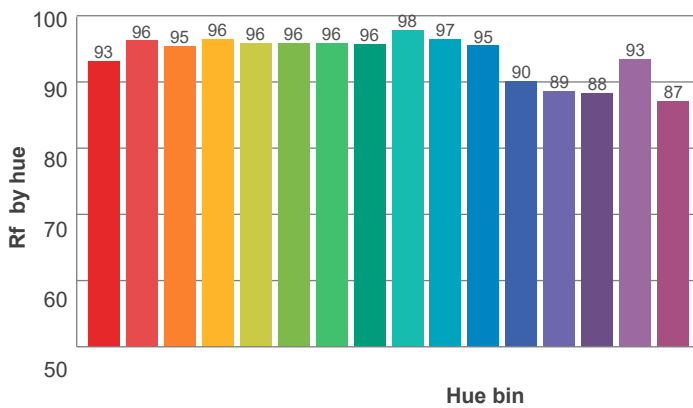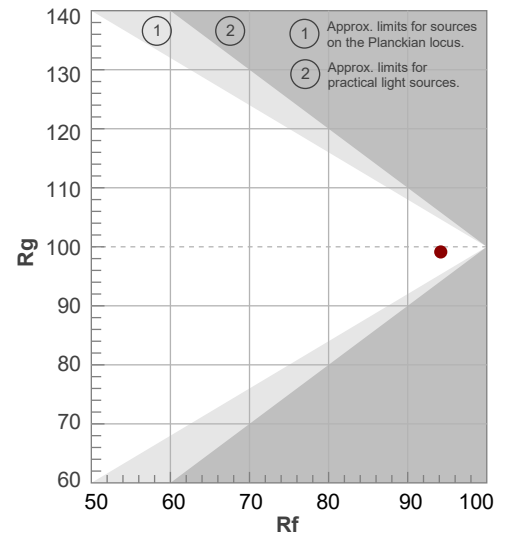


Red: 34.4%, Power=4.6mW

Blue: 7.3%, Power=3.0mW

Green: 27.1%, Power=9.3mW

UVA: 0.1%, Power=0.0mW

Dominant Wavelength: 583nm

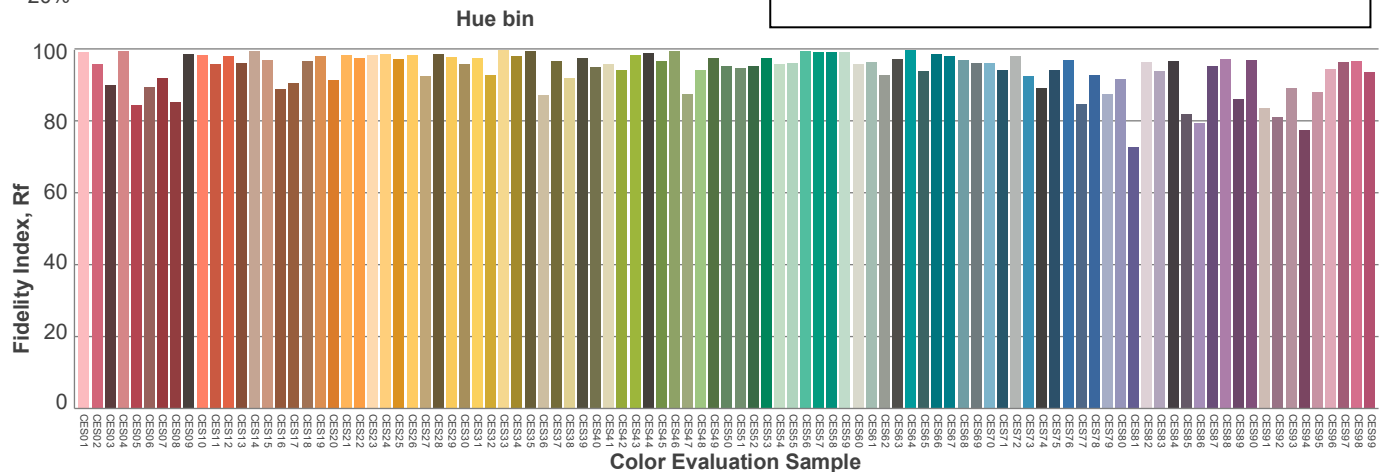1st Peak Wavelength: 631nm2nd Peak Wavelength: 613nm

Glare Evaluation According to UGR

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size H = mounting height above eye level X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	25.8	26.6	26.0	26.9	27.1	25.8	26.6	26.0	26.9	27.1
	3H	25.9	26.8	26.3	27.0	27.2	25.9	26.8	26.3	27.0	27.2
	4H	25.9	26.7	26.3	27.0	27.2	25.9	26.7	26.3	27.0	27.2
	6H	25.9	26.6	26.2	26.9	27.3	25.9	26.6	26.2	26.9	27.3
	8H	25.8	26.5	26.2	26.9	27.2	25.8	26.5	26.2	26.9	27.2
	12H	25.8	26.5	26.1	26.8	27.2	25.8	26.5	26.1	26.8	27.2
4H	2H	25.8	26.7	26.2	26.9	27.2	25.8	26.7	26.2	26.9	27.2
	3H	26.1	26.8	26.5	27.1	27.6	26.1	26.8	26.5	27.1	27.6
	4H	26.0	26.7	26.5	27.1	27.6	26.0	26.7	26.5	27.1	27.6
	6H	26.0	26.6	26.5	27.0	27.3	26.0	26.6	26.5	27.0	27.3
	8H	26.0	26.5	26.5	26.9	27.3	26.0	26.5	26.5	26.9	27.3
	12H	25.9	26.4	26.4	26.8	27.3	25.9	26.4	26.4	26.8	27.3
8H	4H	26.0	26.5	26.5	26.9	27.3	26.0	26.5	26.5	26.9	27.3
	6H	26.0	26.4	26.5	26.8	27.4	26.0	26.4	26.5	26.8	27.4
	8H	26.0	26.3	26.5	26.8	27.4	26.0	26.3	26.5	26.8	27.4
	12H	25.9	26.2	26.5	26.7	27.3	25.9	26.2	26.5	26.7	27.3
12H	4H	25.9	26.4	26.4	26.8	27.3	25.9	26.4	26.4	26.8	27.3
	6H	26.0	26.3	26.5	26.8	27.4	26.0	26.3	26.5	26.8	27.4
	8H	25.9	26.2	26.5	26.7	27.3	25.9	26.2	26.5	26.7	27.3
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.8 / -1.3					0.8 / -1.3				
S = 1.5H		1.9 / -2.8					1.9 / -2.8				
S = 2.0H		3.3 / -5.0					3.3 / -5.0				
Corrected glare indices referring to 786 lm total luminous flux											