

Light efficiency:

91 Lumen/Watt

Color temperature:

3600 K

Light quality:

CRI:97.0, R_g:101.9, R_f:94.1

R9: 90.4 / P: 2 / V: - / F: 2

Output: 912 lm

Peak: 1174 cd

Power: 10.0 W

Voltage: 120 V

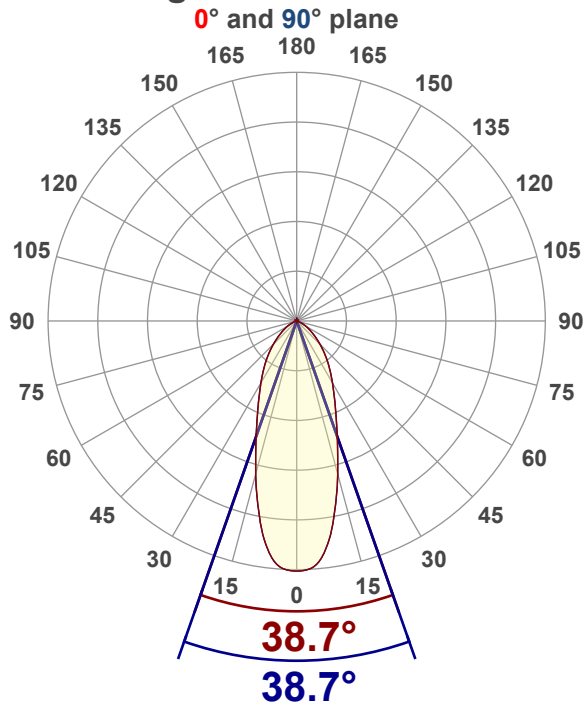
Current: 0.089 A

PF: 0.94

THD: 35.86 %



Angular Distribution



Product name:

RA4-10G-CCT-OJB-WH-35K

Test Date:

9/24/2026

Beam Angle (50% of the brightness of the centre):
38.7°Field Angle (10% of the brightness of the centre):
98.9°Cut Off Angle (2.5% of the brightness of the centre):
129.7°

Beam Details

*measured at centre of beam

Mounting Height (feet)\(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	790 lx	73 fc	2.8 ft / 0.9 m
8 ft / 2.4 m	197 lx	18 fc	5.6 ft / 1.7 m
12 ft / 3.7 m	88 lx	8 fc	8.4 ft / 2.6 m
16 ft / 4.9 m	49 lx	5 fc	11.2 ft / 3.4 m
20 ft / 6.1 m	32 lx	3 fc	14 ft / 4.3 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	514	56.36%
0-40	682	74.78%
0-60	874	95.83%
60-90	37.2	4.08%
70-100	7.70	0.84%
90-120	0.227	0.02%
0-90	911	99.89%
90-180	1.14	0.13%
0-180	912	100.00%

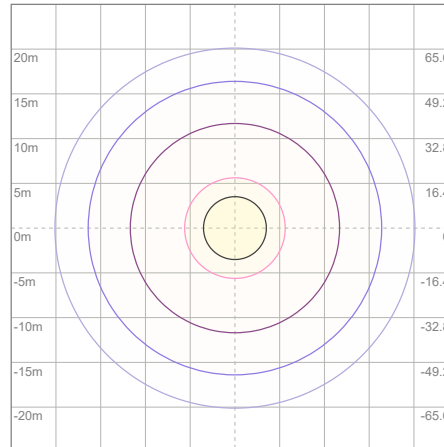ISO Lux Diagram



Lux at center:	126 lx
3%	3.78 lx
5%	6.30 lx
10%	12.60 lx
30%	37.80 lx
50%	63.00 lx

Conditions:

Number of planes: 8

Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91
2	106	100	95	92	103	98	94	90	95	91	88	92	89	86	89	87	85	83
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75
4	93	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	70	69
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	63
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54
8	74	64	57	53	73	63	57	52	62	56	52	61	56	52	60	55	52	50
9	71	60	53	49	69	59	53	49	58	53	49	57	52	49	57	52	48	47
10	67	57	50	46	66	56	50	46	55	50	46	54	49	46	54	49	45	44


LAMPS (number of lamps)

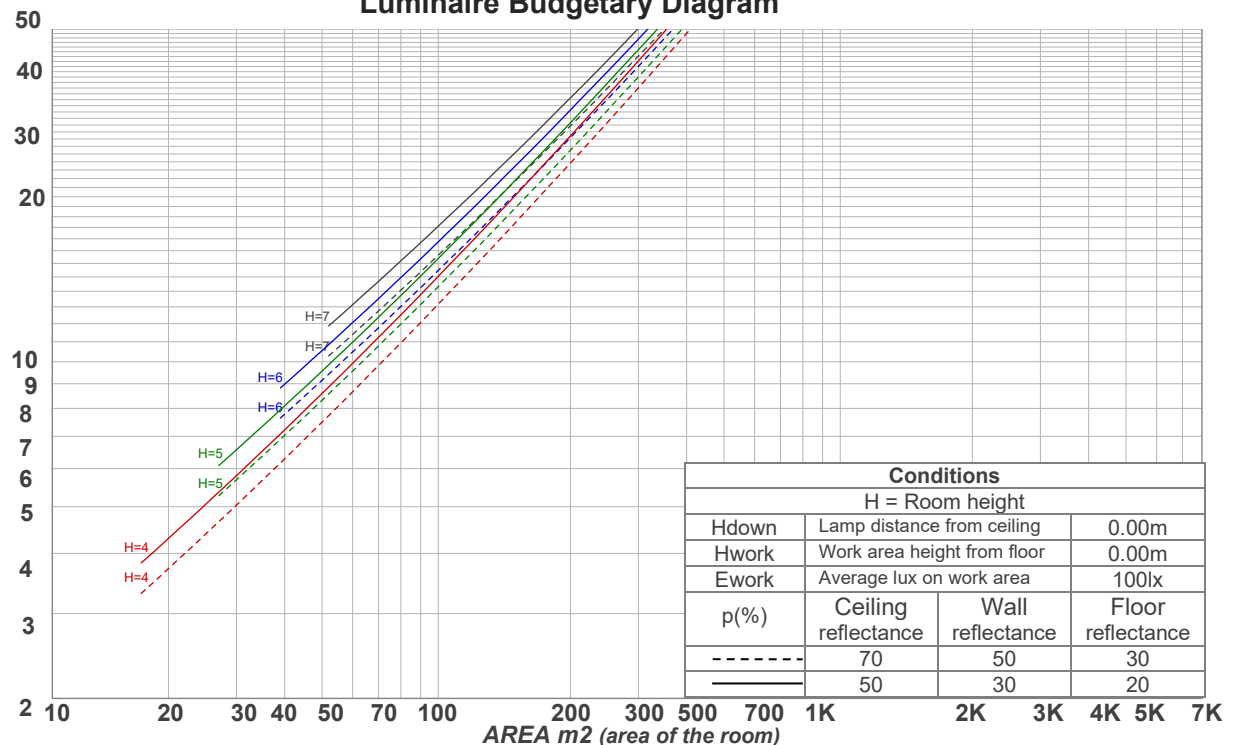Luminaire Budgetary Diagram








ANSI/IES TM-30-18

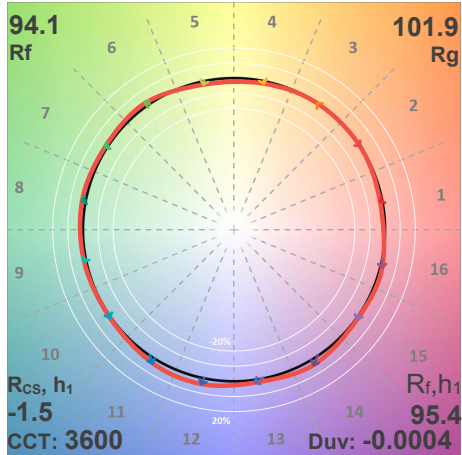P: 2 / V: - / F: 2



Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
1	95	-1%	0%
2	97	0%	0%
3	96	0%	1%
4	97	-1%	-1%
5	94	-2%	1%
6	95	2%	3%
7	95	1%	2%
8	95	2%	1%
9	97	1%	2%
10	95	1%	3%
11	92	3%	4%
12	89	4%	-1%
13	91	2%	-6%
14	90	4%	-6%
15	91	1%	-4%
16	90	1%	-6%

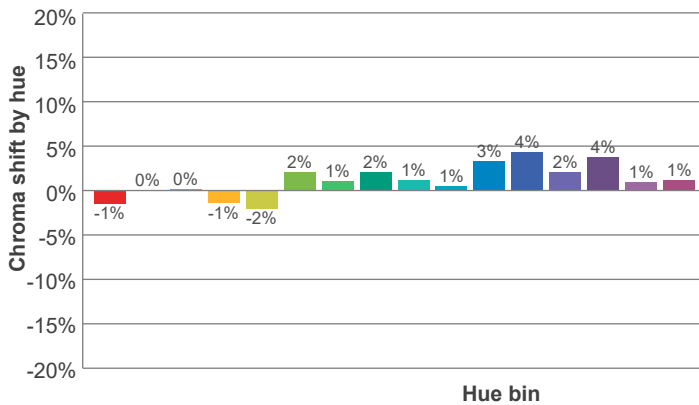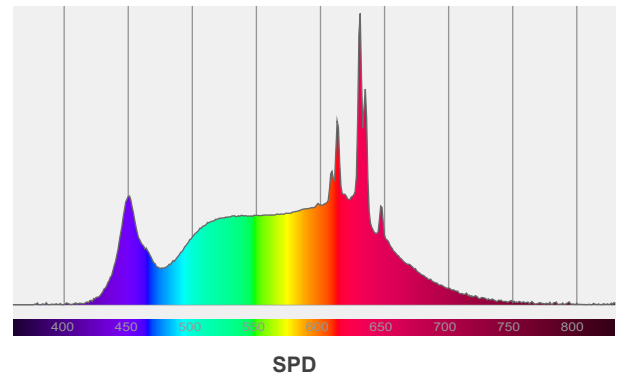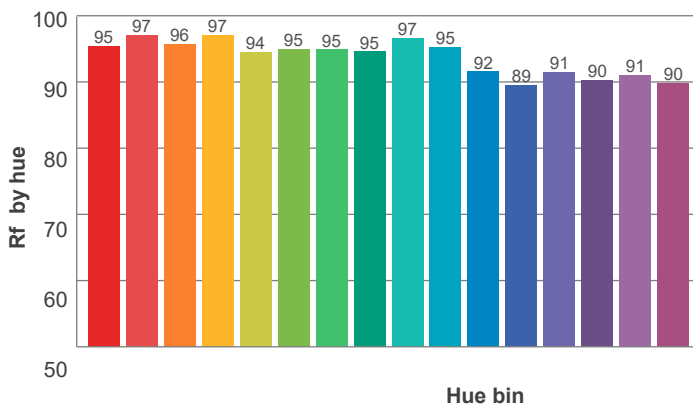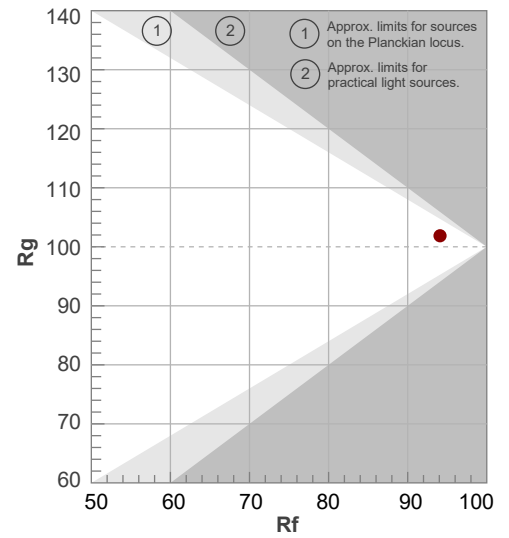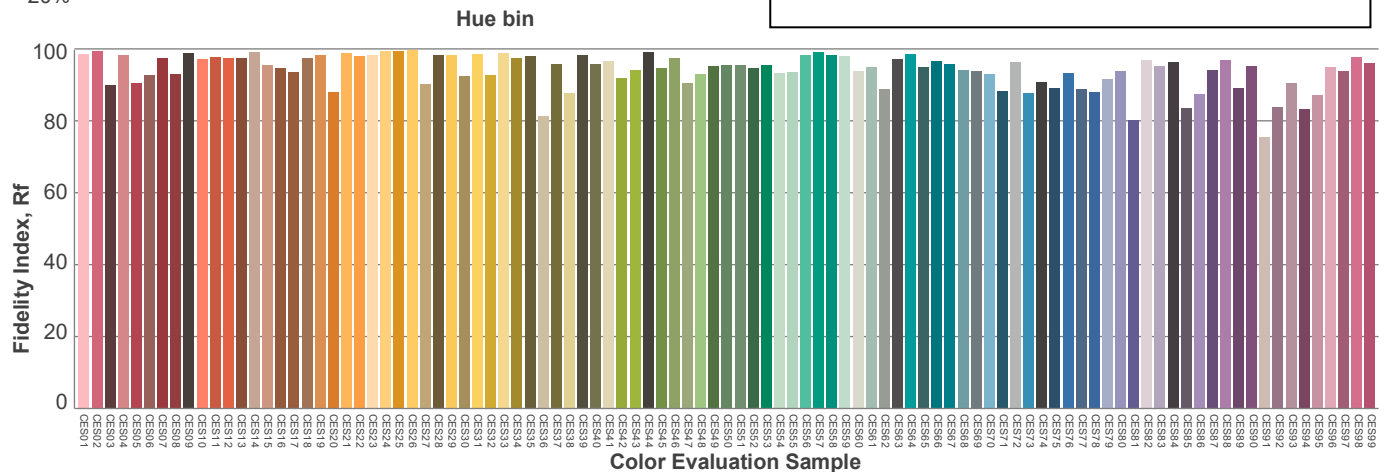**Red: 28.5%, Power=4.0mW****Blue: 12%, Power=5.7mW****Green: 30%, Power=12.0mW****UVA: 0.1%, Power=0.0mW****Dominant Wavelength: 582nm****1st Peak Wavelength: 631nm****2nd Peak Wavelength: 613nm**

Glare Evaluation According to UGR

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size H = mounting height above eye level X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	26.4	27.2	26.5	27.5	27.7	26.4	27.2	26.5	27.5	27.7
	3H	26.4	27.3	26.8	27.5	27.7	26.4	27.3	26.8	27.5	27.7
	4H	26.4	27.2	26.8	27.5	27.7	26.4	27.2	26.8	27.5	27.7
	6H	26.4	27.1	26.7	27.4	27.8	26.4	27.1	26.7	27.4	27.8
	8H	26.3	27.0	26.7	27.4	27.8	26.3	27.0	26.7	27.4	27.8
	12H	26.3	27.0	26.6	27.3	27.7	26.3	27.0	26.6	27.3	27.7
4H	2H	26.4	27.2	26.8	27.5	27.7	26.4	27.2	26.8	27.5	27.7
	3H	26.6	27.3	27.0	27.6	28.1	26.6	27.3	27.0	27.6	28.1
	4H	26.5	27.2	27.0	27.6	28.1	26.5	27.2	27.0	27.6	28.1
	6H	26.5	27.1	27.0	27.5	27.8	26.5	27.1	27.0	27.5	27.8
	8H	26.4	27.0	27.0	27.4	27.7	26.4	27.0	27.0	27.4	27.7
	12H	26.4	26.8	26.9	27.3	27.7	26.4	26.8	26.9	27.3	27.7
8H	4H	26.4	27.0	27.0	27.4	27.7	26.4	27.0	27.0	27.4	27.7
	6H	26.4	26.8	26.9	27.3	27.8	26.4	26.8	26.9	27.3	27.8
	8H	26.4	26.8	26.9	27.3	27.9	26.4	26.8	26.9	27.3	27.9
	12H	26.4	26.6	27.0	27.1	27.8	26.4	26.6	27.0	27.1	27.8
12H	4H	26.4	26.9	26.9	27.3	27.7	26.4	26.9	26.9	27.3	27.7
	6H	26.4	26.7	26.9	27.3	27.9	26.4	26.7	26.9	27.3	27.9
	8H	26.4	26.6	27.0	27.2	27.8	26.4	26.6	27.0	27.2	27.8
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.8 / -1.3					0.8 / -1.3				
S = 1.5H		1.9 / -3.1					1.9 / -3.1				
S = 2.0H		3.3 / -5.7					3.3 / -5.7				
Corrected glare indices referring to 912 lm total luminous flux											