

Light efficiency:

84 Lumen/Watt

Color temperature:

4051 K

Light quality:

CRI:93.5, R_g:89.3, R_f:97.2

P: 2 / V: - / F: 3

Output: 1132 lm

Peak: 379 cd


Power: 13.4 W

Voltage: 119 V

Current: 0.124 A


PF: 0.91

THD: 45.19 %



Angular Distribution

0° and 90° plane

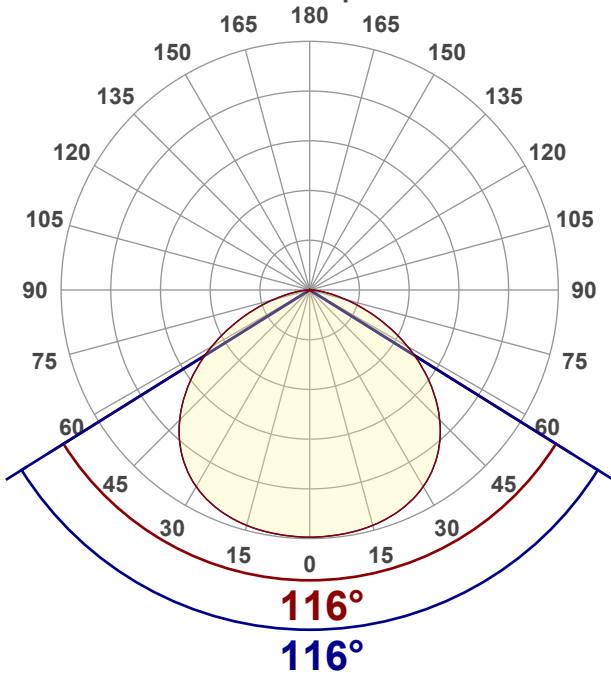

Product name:

SLMT6-13W-WH - 4000K

Test Date:

12/1/2025

Beam Angle (50% of the brightness of the centre):

116°

Field Angle (10% of the brightness of the centre):

156.8°

Cut Off Angle (2.5% of the brightness of the centre):

171.7°

Beam Details

*measured at centre of beam

Mounting Height (feet)/(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	255 lx	24 fc	12.8 ft / 3.9 m
8 ft / 2.4 m	64 lx	6 fc	25.6 ft / 7.8 m
12 ft / 3.7 m	28 lx	3 fc	38.4 ft / 11.7 m
16 ft / 4.9 m	16 lx	1 fc	51.2 ft / 15.6 m
20 ft / 6.1 m	10 lx	1 fc	64 ft / 19.5 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	308	27.21%
0-40	516	45.58%
0-60	923	81.54%
60-90	207	18.29%
70-100	76.2	6.73%
90-120	0.814	0.07%
0-90	1130	99.82%
90-180	1.91	0.17%
0-180	1132	100.00%

ISO Lux Diagram

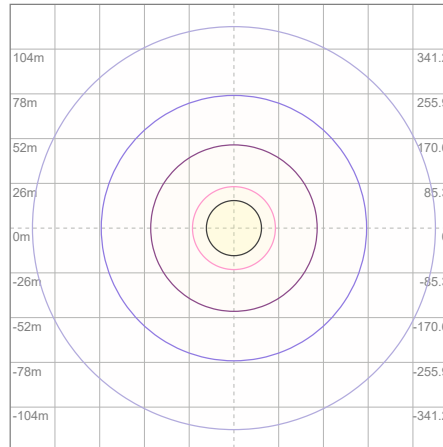

Lux at center:	41 lx
3%	1.23 lx
5%	2.05 lx
10%	4.10 lx
30%	12.30 lx
50%	20.50 lx

Conditions:

Number of planes: 8

Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	106	102	99	95	98	95	92	94	92	89	91	89	87	85
2	99	91	85	79	97	90	83	78	86	81	76	83	78	75	80	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	68	63	70	66	62	60
4	83	71	63	56	81	70	62	55	67	60	55	65	59	54	63	58	53	51
5	76	64	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44
6	70	57	48	42	68	56	48	42	54	47	41	53	46	41	51	45	41	38
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	47	40	36	34
8	61	47	39	33	59	46	38	33	45	38	32	44	37	32	43	37	32	30
9	57	43	35	29	55	43	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	27	38	31	26	37	31	26	36	30	26	24


LAMPS (number of lamps)

Luminaire Budgetary Diagram




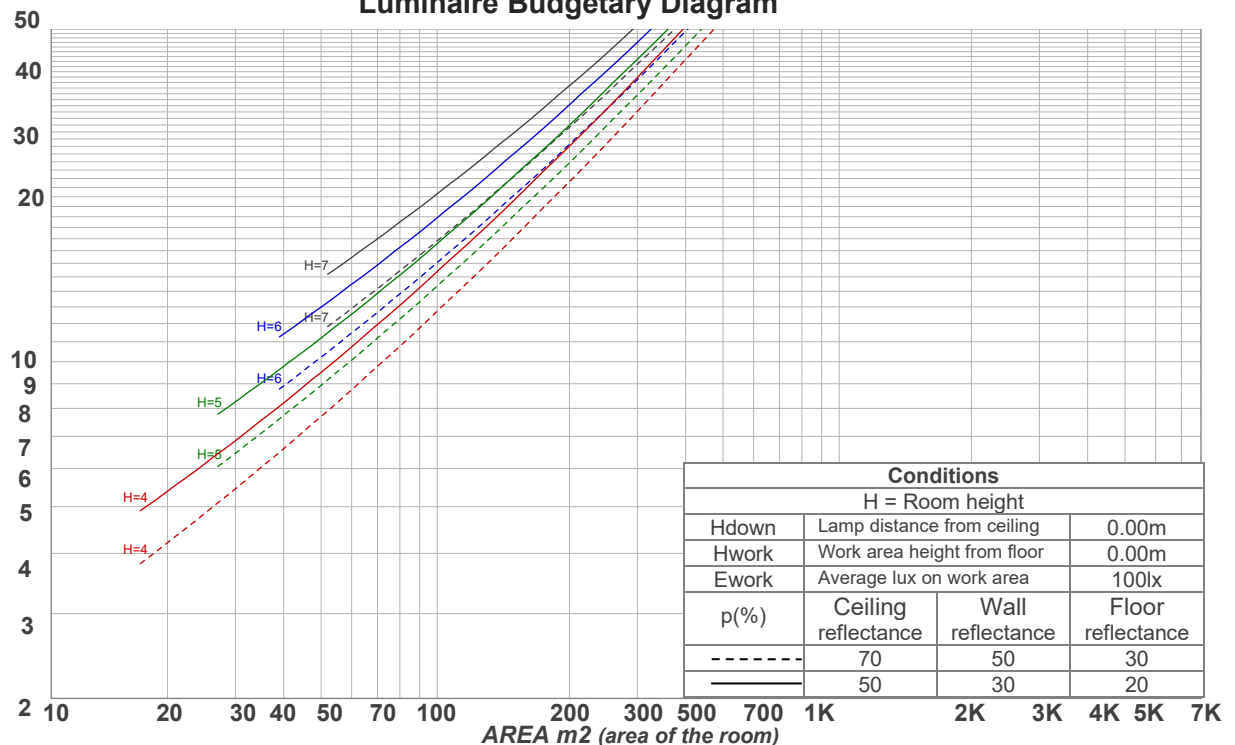


ANSI/IES TM-30-18

P: 2 / V: - / F: 3

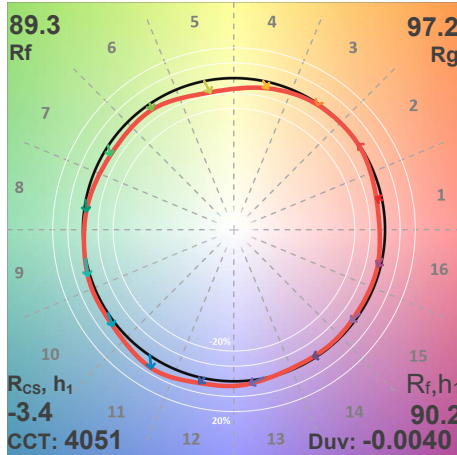

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	90	-3%	2%
2	94	0%	1%
3	95	-1%	0%
4	91	-4%	-4%
5	89	-8%	-2%
6	94	-4%	1%
7	90	-5%	5%
8	88	-2%	7%
9	85	1%	11%
10	86	2%	8%
11	87	7%	5%
12	90	4%	-2%
13	87	2%	-9%
14	93	-1%	-3%
15	85	-2%	-7%
16	86	-2%	-5%

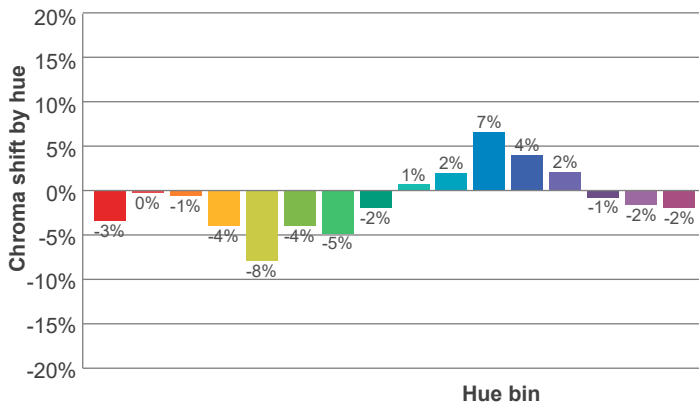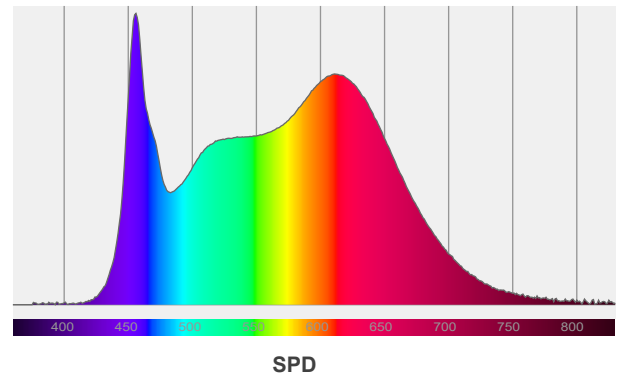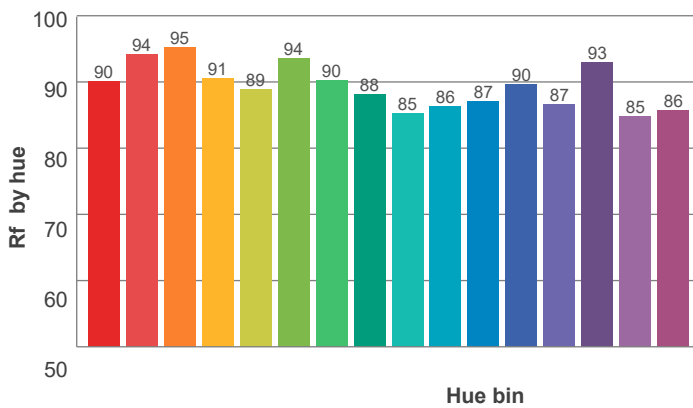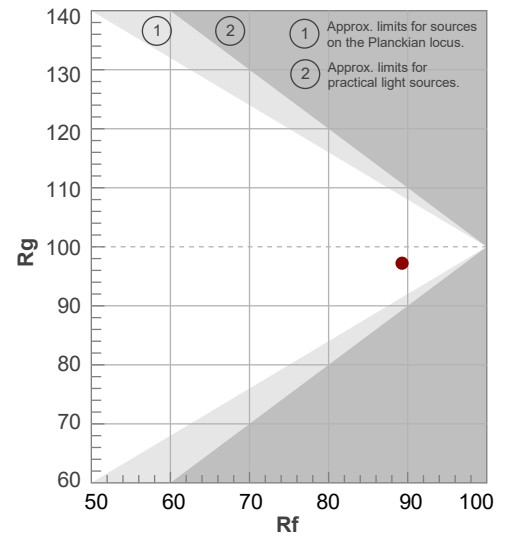


Red: 28%, Power=7.5mW

Blue: 17.6%, Power=14.4mW

Green: 27.4%, Power=14.4mW

UVA: 0.1%, Power=0.0mW

Dominant Wavelength: 584nm

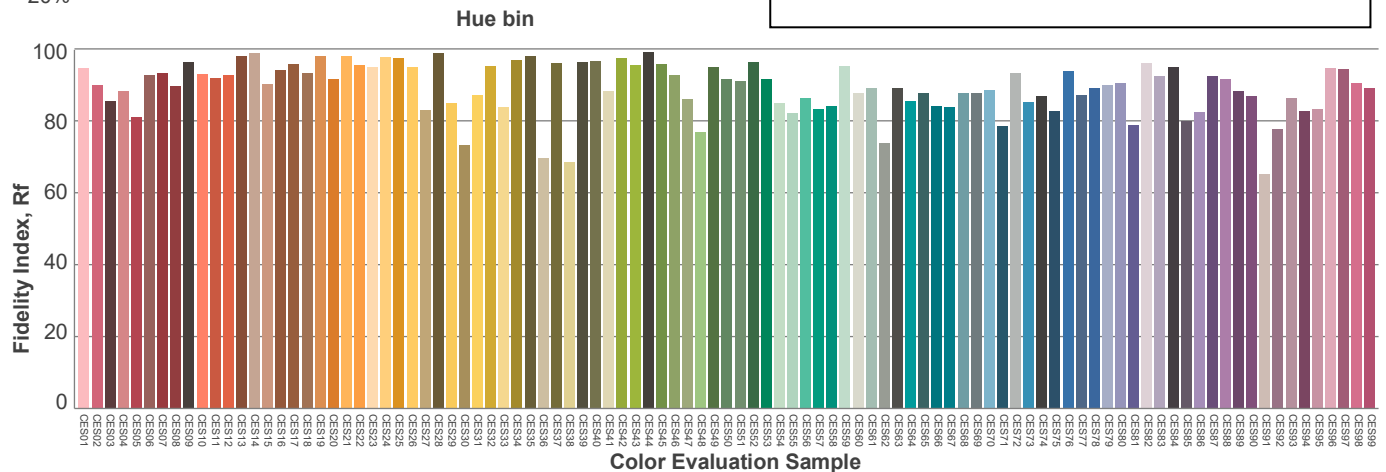1st Peak Wavelength: 456nm2nd Peak Wavelength: 611nm

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	24.5	25.7	24.7	26.0	26.2	24.5	25.7	24.7	26.0	26.2
	3H	25.7	26.9	26.1	27.2	27.4	25.7	26.9	26.1	27.2	27.4
	4H	26.1	27.3	26.5	27.5	27.8	26.1	27.3	26.5	27.5	27.8
	6H	26.4	27.4	26.7	27.7	28.1	26.4	27.4	26.7	27.7	28.1
	8H	26.5	27.5	26.8	27.8	28.2	26.5	27.5	26.8	27.8	28.2
	12H	26.5	27.4	26.8	27.8	28.2	26.5	27.4	26.8	27.8	28.2
4H	2H	25.0	26.2	25.4	26.5	26.7	25.0	26.2	25.4	26.5	26.7
	3H	26.5	27.4	26.8	27.8	28.2	26.5	27.4	26.8	27.8	28.2
	4H	26.9	27.8	27.4	28.2	28.8	26.9	27.8	27.4	28.2	28.8
	6H	27.3	28.1	27.8	28.5	28.8	27.3	28.1	27.8	28.5	28.8
	8H	27.3	28.1	27.9	28.5	28.9	27.3	28.1	27.9	28.5	28.9
	12H	27.4	28.0	27.9	28.5	28.9	27.4	28.0	27.9	28.5	28.9
8H	4H	27.1	27.9	27.6	28.3	28.6	27.1	27.9	27.6	28.3	28.6
	6H	27.6	28.1	28.1	28.6	29.2	27.6	28.1	28.1	28.6	29.2
	8H	27.7	28.2	28.2	28.8	29.4	27.7	28.2	28.2	28.8	29.4
	12H	27.8	28.2	28.4	28.8	29.4	27.8	28.2	28.4	28.8	29.4
12H	4H	27.1	27.7	27.6	28.2	28.6	27.1	27.7	27.6	28.2	28.6
	6H	27.6	28.1	28.1	28.6	29.3	27.6	28.1	28.1	28.6	29.3
	8H	27.8	28.2	28.4	28.7	29.3	27.8	28.2	28.4	28.7	29.3
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.3 / -0.4					0.3 / -0.4				
S = 2.0H		0.7 / -0.8					0.7 / -0.8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1132 lm total luminous flux											