

Light efficiency:

86 Lumen/Watt

Color temperature:

5264 K

Light quality:

CRI:93.5, R_g:89.1, R_f:96.6

P: 2 / V: - / F: 3

Output: 1117 lm

Peak: 374 cd


Power: 13.1 W

Voltage: 119 V


Current: 0.121 A

PF: 0.9

THD: 47.31 %



Angular Distribution

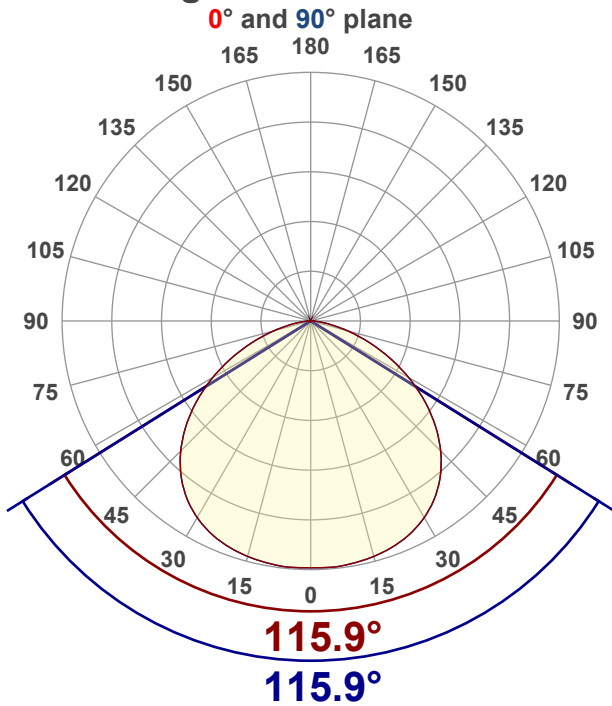

Product name:

SLMT6-13W-WH - 5000K

Test Date:

12/1/2025

Beam Angle (50% of the brightness of the centre):

115.9°

Field Angle (10% of the brightness of the centre):

157.1°

Cut Off Angle (2.5% of the brightness of the centre):

171.8°

Beam Details

*measured at centre of beam

Mounting Height (feet)/(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	252 lx	23 fc	12.8 ft / 3.9 m
8 ft / 2.4 m	63 lx	6 fc	25.6 ft / 7.8 m
12 ft / 3.7 m	28 lx	3 fc	38.4 ft / 11.7 m
16 ft / 4.9 m	16 lx	1 fc	51.2 ft / 15.6 m
20 ft / 6.1 m	10 lx	1 fc	63.9 ft / 19.5 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	304	27.22%
0-40	508	45.48%
0-60	908	81.29%
60-90	207	18.53%
70-100	77.4	6.93%
90-120	0.974	0.09%
0-90	1115	99.82%
90-180	2.04	0.18%
0-180	1117	100.00%

ISO Lux Diagram

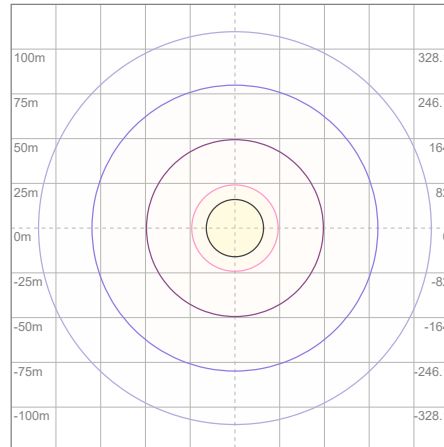

Lux at center:	40 lx
3%	1.20 lx
5%	2.00 lx
10%	4.00 lx
30%	12.00 lx
50%	20.00 lx

Conditions:

Number of planes: 8

Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	100	97	106	102	99	95	98	95	92	94	92	89	90	88	87	84
2	99	91	85	79	97	89	83	78	86	81	76	83	78	75	80	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63	70	66	62	60
4	83	71	62	56	81	70	62	55	67	60	55	65	59	54	63	57	53	51
5	76	63	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44
6	70	57	48	42	68	56	48	42	54	47	41	53	46	41	51	45	40	38
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	40	36	34
8	61	47	39	33	59	46	38	33	45	38	32	44	37	32	43	37	32	30
9	57	43	35	29	55	43	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	27	38	31	26	37	31	26	36	30	26	24


LAMPS (number of lamps)

Luminaire Budgetary Diagram




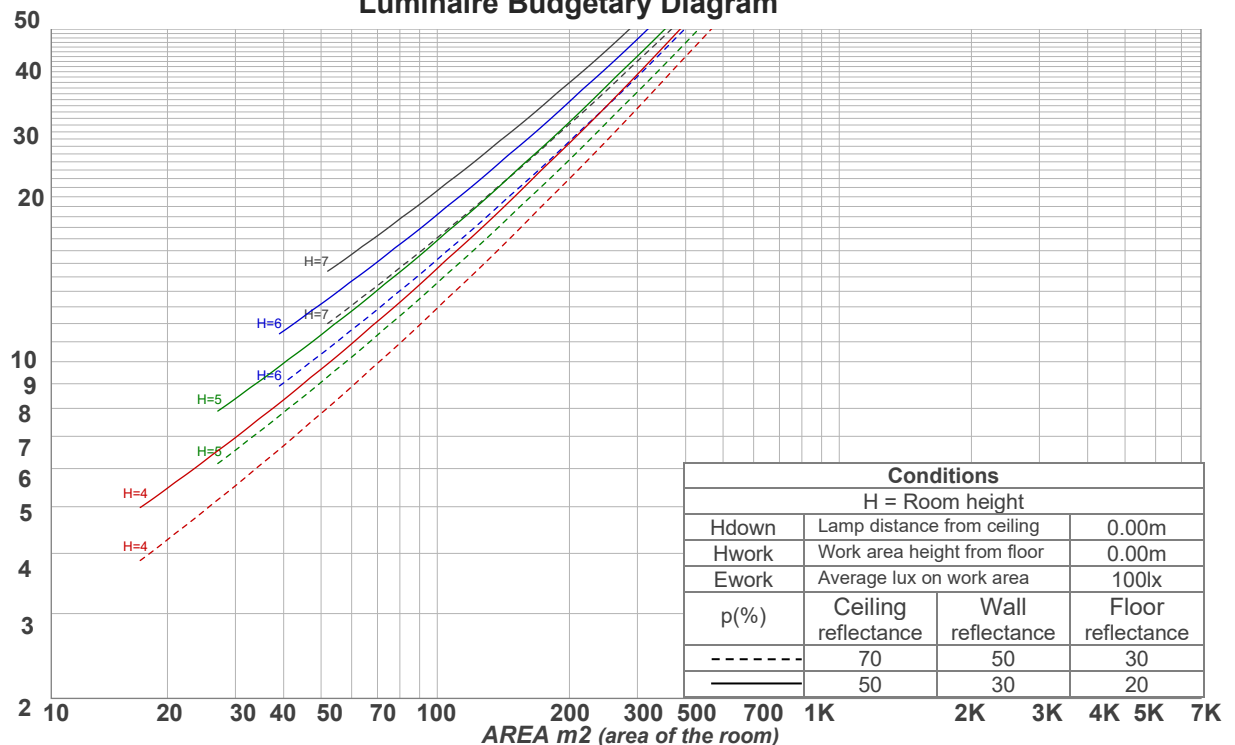


ANSI/IES TM-30-18

P: 2 / V: - / F: 3

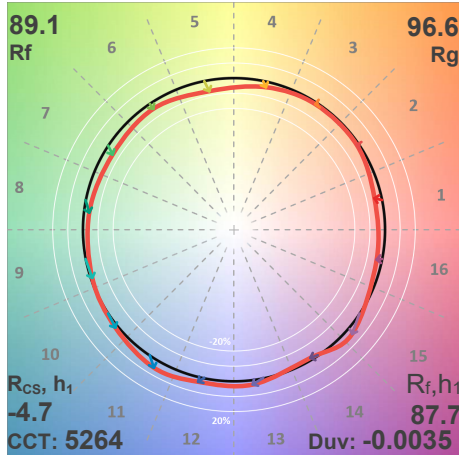

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	88	-5%	2%
2	94	-1%	1%
3	95	-1%	1%
4	91	-4%	-2%
5	90	-7%	-2%
6	94	-4%	0%
7	90	-6%	3%
8	86	-4%	8%
9	86	-2%	13%
10	84	1%	10%
11	86	5%	7%
12	93	3%	-3%
13	89	3%	-8%
14	91	-1%	-5%
15	80	3%	-14%
16	91	-3%	-1%

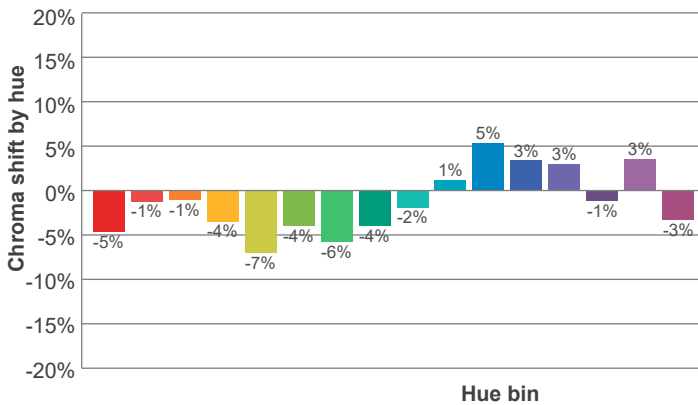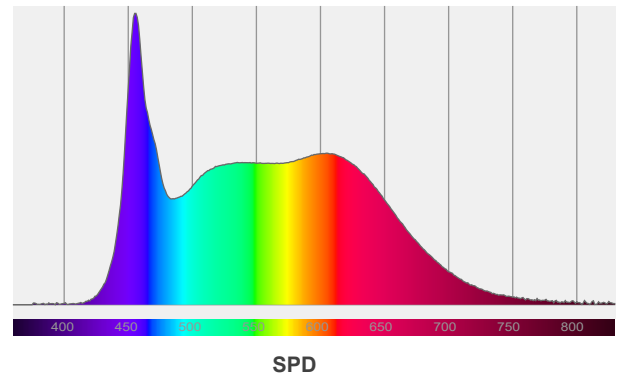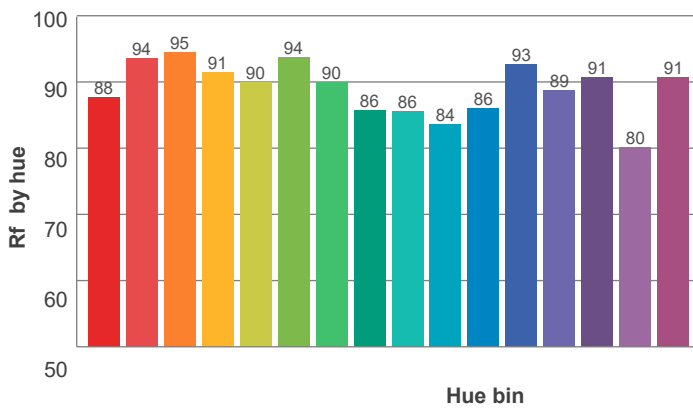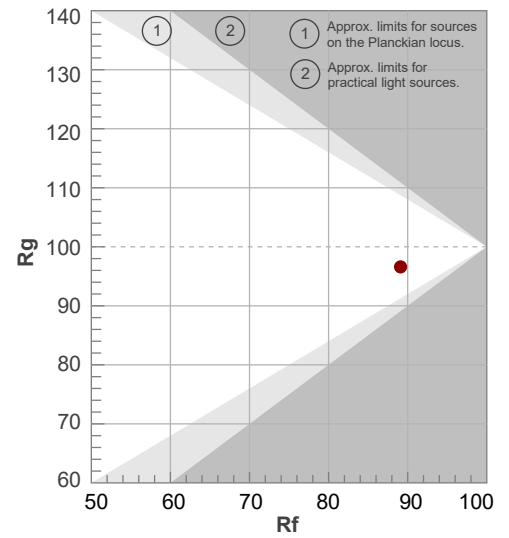


Red: 22.8%, Power=6.1mW

Blue: 22.1%, Power=18.0mW

Green: 29.5%, Power=15.5mW

UVA: 0.1%, Power=0.0mW

Dominant Wavelength: 583nm

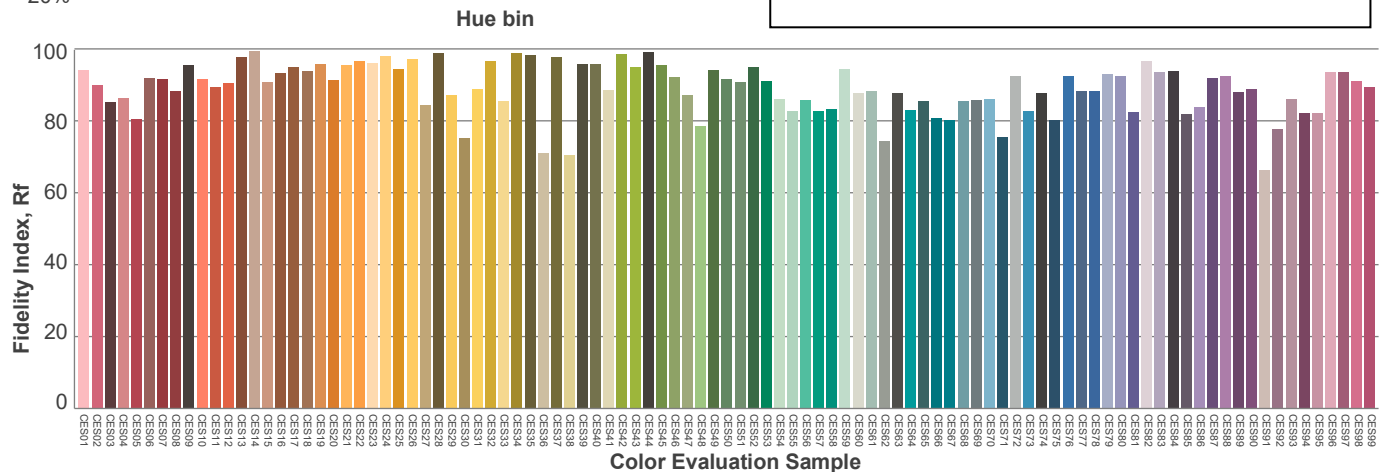1st Peak Wavelength: 455nm2nd Peak Wavelength: 605nm

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	24.5	25.7	24.7	26.0	26.2	24.5	25.7	24.7	26.0	26.2
	3H	25.6	26.9	26.0	27.1	27.3	25.6	26.9	26.0	27.1	27.3
	4H	26.0	27.2	26.4	27.5	27.8	26.0	27.2	26.4	27.5	27.8
	6H	26.3	27.4	26.7	27.7	28.0	26.3	27.4	26.7	27.7	28.0
	8H	26.4	27.4	26.7	27.7	28.1	26.4	27.4	26.7	27.7	28.1
	12H	26.4	27.4	26.8	27.7	28.2	26.4	27.4	26.8	27.7	28.2
4H	2H	25.0	26.2	25.4	26.4	26.7	25.0	26.2	25.4	26.4	26.7
	3H	26.4	27.4	26.8	27.7	28.2	26.4	27.4	26.8	27.7	28.2
	4H	26.9	27.8	27.3	28.2	28.7	26.9	27.8	27.3	28.2	28.7
	6H	27.2	28.0	27.7	28.4	28.8	27.2	28.0	27.7	28.4	28.8
	8H	27.3	28.1	27.8	28.4	28.8	27.3	28.1	27.8	28.4	28.8
	12H	27.3	28.0	27.8	28.4	28.9	27.3	28.0	27.8	28.4	28.9
8H	4H	27.1	27.8	27.6	28.2	28.6	27.1	27.8	27.6	28.2	28.6
	6H	27.5	28.1	28.0	28.5	29.1	27.5	28.1	28.0	28.5	29.1
	8H	27.7	28.2	28.2	28.7	29.3	27.7	28.2	28.2	28.7	29.3
	12H	27.7	28.2	28.3	28.7	29.3	27.7	28.2	28.3	28.7	29.3
12H	4H	27.0	27.7	27.5	28.1	28.6	27.0	27.7	27.5	28.1	28.6
	6H	27.5	28.0	28.0	28.6	29.2	27.5	28.0	28.0	28.6	29.2
	8H	27.7	28.1	28.3	28.6	29.2	27.7	28.1	28.3	28.6	29.2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.3 / -0.4					0.3 / -0.4				
S = 2.0H		0.7 / -0.8					0.7 / -0.8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1117 lm total luminous flux											