

Light efficiency:

102 Lumen/Watt

Color temperature:

3003 K

Light quality:

CRI:95.9, R_g:93.0, R_f:100.8

P: 2 / V: - / F: 2

Output: 977 lm

Peak: 346 cd

Power: 9.5 W

Voltage: 120 V


Current: 0.085 A

PF: 0.93

THD: 39.91 %



Angular Distribution

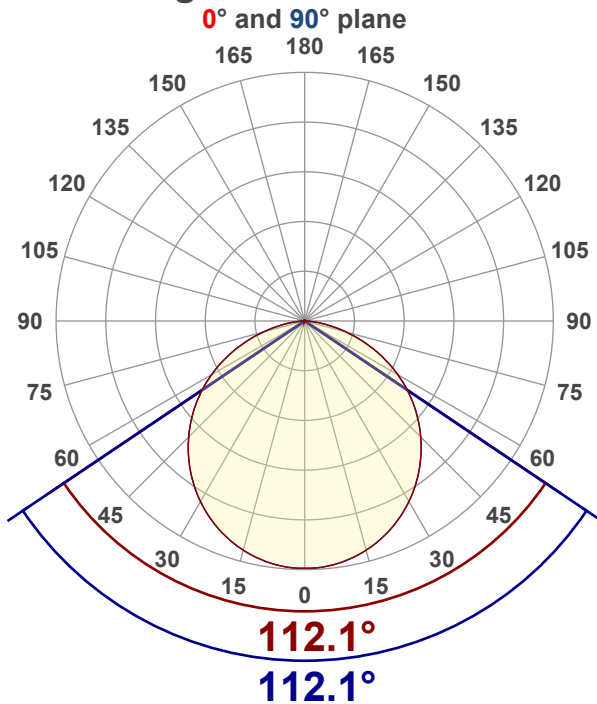

Product name:

SLMT4-10W - 3000K

Test Date:

11/27/2025

Beam Angle (50% of the brightness of the centre):

112.1°

Field Angle (10% of the brightness of the centre):

159.7°

Cut Off Angle (2.5% of the brightness of the centre):

172.4°

Beam Details

*measured at centre of beam

Mounting Height (feet)\(meter)	Lux*	Footcandles*	Beam width (feet) / (meter)
4 ft / 1.2 m	233 lx	22 fc	11.9 ft / 3.6 m
8 ft / 2.4 m	58 lx	5 fc	23.8 ft / 7.2 m
12 ft / 3.7 m	26 lx	2 fc	35.7 ft / 10.9 m
16 ft / 4.9 m	15 lx	1 fc	47.5 ft / 14.5 m
20 ft / 6.1 m	9 lx	1 fc	59.4 ft / 18.1 m


Beam center

Photometric Testing Report

Zonal Lumen Summary

Zone	Lumen	%Luminaire
0-30	269	27.53%
0-40	440	45.04%
0-60	777	79.53%
60-90	199	20.37%
70-100	80.0	8.19%
90-120	0.384	0.04%
0-90	976	99.90%
90-180	0.889	0.09%
0-180	977	100.00%

ISO Lux Diagram

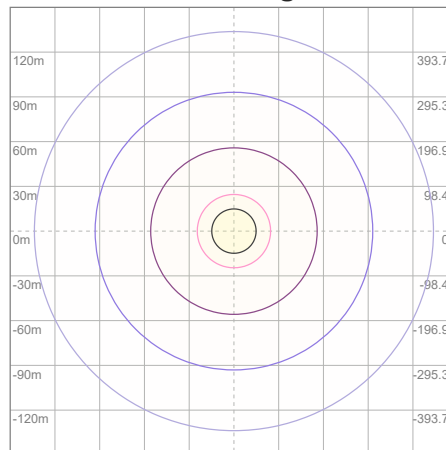

Lux at center:	37 lx
3%	1.11 lx
5%	1.85 lx
10%	3.70 lx
30%	11.10 lx
50%	18.50 lx

Conditions:
 Number of planes: 8
 Lux distribution on a surface when lamp is mounted at 3.05 meters from the surface.


Mounting height: 3.05 meters (10 feet)

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	104	100	96	106	102	98	95	98	94	91	94	91	89	90	88	86	84
2	99	91	84	78	96	89	83	77	85	80	76	82	78	74	79	75	72	70
3	90	80	72	65	88	78	71	64	75	69	63	72	67	62	70	65	61	59
4	83	71	62	55	80	69	61	55	67	60	54	64	58	53	62	57	52	50
5	76	63	54	47	74	62	53	47	60	52	47	58	51	46	56	50	46	43
6	70	57	48	41	68	56	47	41	54	46	41	52	46	40	51	45	40	38
7	65	51	43	36	63	51	42	36	49	42	36	48	41	36	46	40	36	34
8	60	47	38	33	59	46	38	32	45	37	32	44	37	32	42	36	32	30
9	56	43	35	29	55	42	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	26	38	31	26	37	31	26	36	30	26	24


LAMPS (number of lamps)

Luminaire Budgetary Diagram




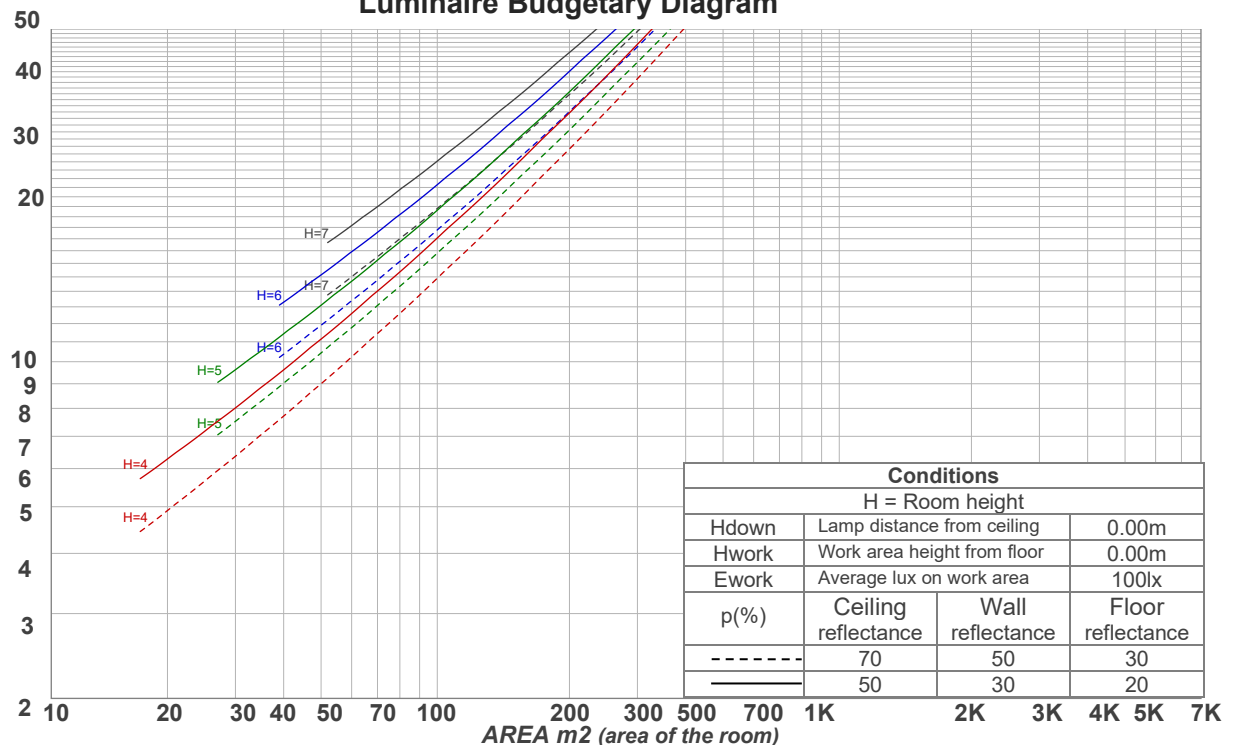


ANSI/IES TM-30-18

P: 2 / V: - / F: 2

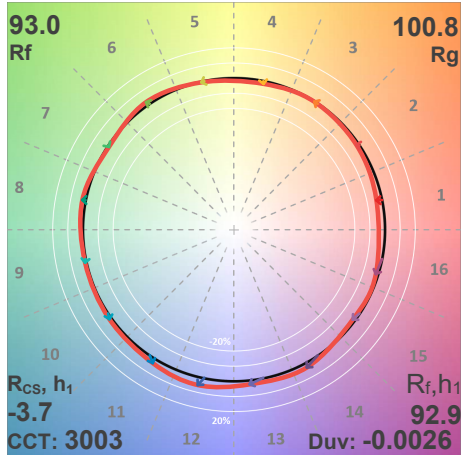

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	93	-4%	1%
2	95	-1%	2%
3	94	0%	3%
4	96	-2%	-1%
5	95	0%	2%
6	95	2%	1%
7	94	-1%	0%
8	96	2%	0%
9	96	1%	2%
10	94	1%	4%
11	93	3%	5%
12	88	6%	-3%
13	87	2%	-10%
14	87	3%	-10%
15	89	-1%	-6%
16	86	-2%	-11%

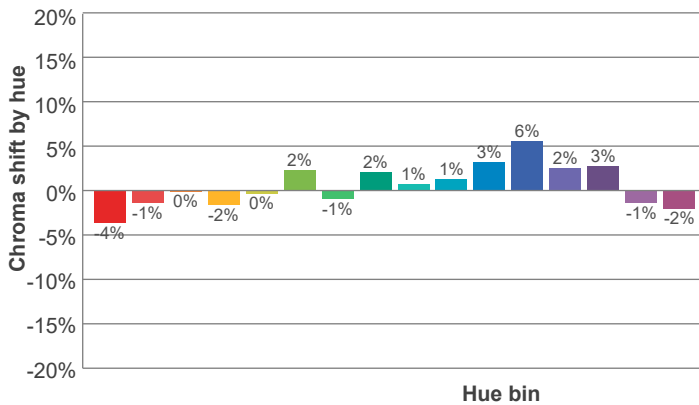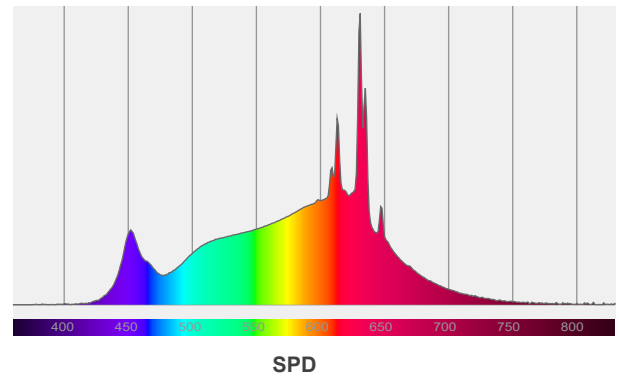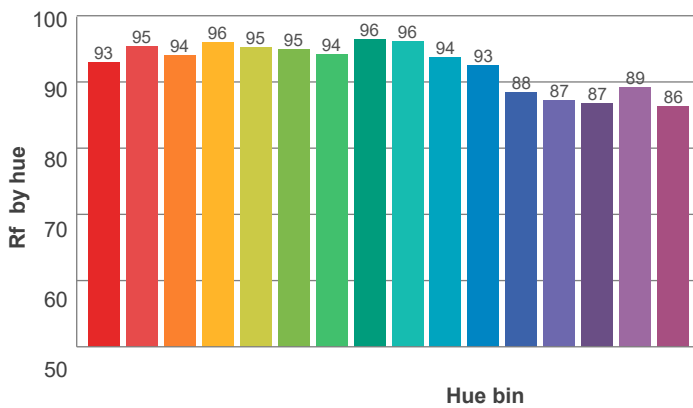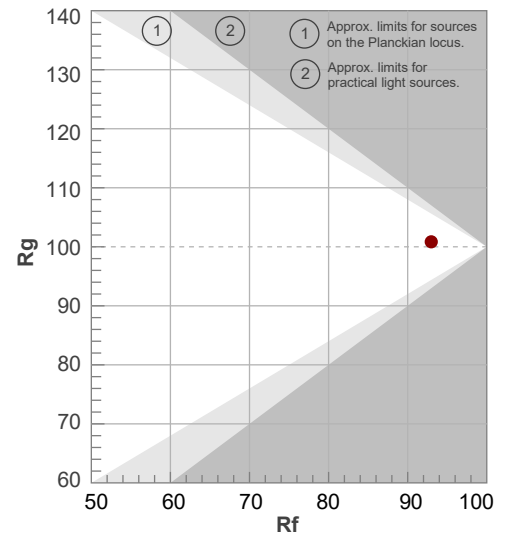


Red: 31.5%, Power=4.4mW

Blue: 10.4%, Power=5.7mW

Green: 27.1%, Power=11.5mW

UVA: 0%, Power=0.0mW

Dominant Wavelength: 585nm

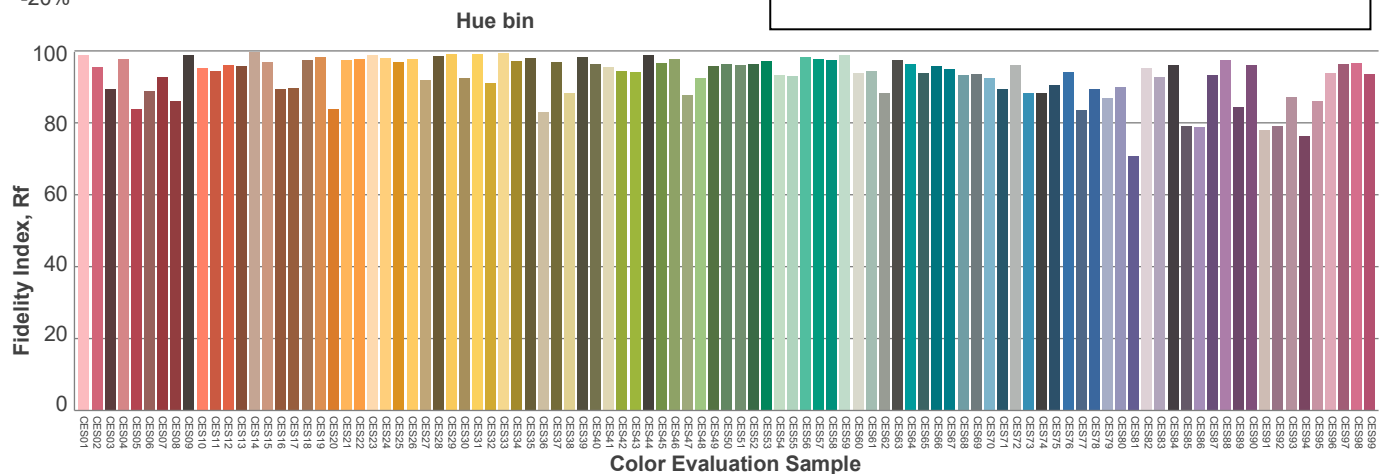1st Peak Wavelength: 631nm2nd Peak Wavelength: 613nm

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	27.9	29.1	28.1	29.4	29.7	27.9	29.1	28.1	29.4	29.7
	3H	29.3	30.6	29.7	30.8	31.1	29.3	30.6	29.7	30.8	31.1
	4H	29.9	31.1	30.3	31.3	31.6	29.9	31.1	30.3	31.3	31.6
	6H	30.3	31.4	30.6	31.6	32.0	30.3	31.4	30.6	31.6	32.0
	8H	30.4	31.4	30.7	31.7	32.2	30.4	31.4	30.7	31.7	32.2
	12H	30.4	31.4	30.8	31.8	32.2	30.4	31.4	30.8	31.8	32.2
4H	2H	28.5	29.7	28.9	30.0	30.2	28.5	29.7	28.9	30.0	30.2
	3H	30.2	31.2	30.6	31.5	32.0	30.2	31.2	30.6	31.5	32.0
	4H	30.8	31.7	31.3	32.1	32.7	30.8	31.7	31.3	32.1	32.7
	6H	31.3	32.2	31.8	32.5	32.9	31.3	32.2	31.8	32.5	32.9
	8H	31.4	32.2	31.9	32.6	33.0	31.4	32.2	31.9	32.6	33.0
	12H	31.5	32.2	32.0	32.6	33.1	31.5	32.2	32.0	32.6	33.1
8H	4H	31.1	31.9	31.6	32.2	32.6	31.1	31.9	31.6	32.2	32.6
	6H	31.7	32.3	32.2	32.7	33.3	31.7	32.3	32.2	32.7	33.3
	8H	31.9	32.4	32.4	33.0	33.6	31.9	32.4	32.4	33.0	33.6
	12H	32.0	32.5	32.6	33.0	33.6	32.0	32.5	32.6	33.0	33.6
12H	4H	31.1	31.7	31.6	32.2	32.6	31.1	31.7	31.6	32.2	32.6
	6H	31.7	32.3	32.3	32.8	33.4	31.7	32.3	32.3	32.8	33.4
	8H	32.0	32.4	32.6	32.9	33.5	32.0	32.4	32.6	32.9	33.5
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.2 / -0.3					0.2 / -0.3				
S = 2.0H		0.5 / -0.5					0.5 / -0.5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 977 lm total luminous flux											