

WRAP

3800-5200 lumens, 29-40 Watts, Color & Wattage

Selectable

Wall and Surface Mount



Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

Description

WRAP, LED linear fixture for commercial applications, Featuring field-adjustable wattage allows installers and facility managers to fine-tune light output and color temperature on-site eliminating the need to stock multiple SKUs. Standard 0-10V dimming is included, with optional occupancy sensor and emergency battery backup available for enhanced functionality and energy savings. WRAP is well suited for a wide range of commercial and light industrial spaces, including stairwells, parking garages, Warehouse, stockrooms and manufacturing and industrial facilities.



Features

Mounting

Can be surface-mounted or wall-mounted.

LED

CCT selectable between 3000 K, 3500 K or 4000 K.

LED Driver

The fixture includes a 120-347V constant current, 0-10V dimming. Minimum start-up temperature -20°C (-40°F) and maximum operating temperature 40°C (104°F). Easy lens removal allows for easy opening of driver cover without the use of tools.

Application

Ideal for storage rooms, staircases and garages.

Additional Options


- Available with optional time adjustable internally mounted occupancy sensor.
- Available with optional emergency backup.

SPECIFICATION	
Application	Surface / Wall
Approved Location	Damp - indoor
Certification	UL Certified - Safety US-CA
Colour Temp.	3000 K / 3500 K / 4000 K
CRI	80
Dimming	Yes
Dimming Tech	0-10V
Lamp Type	LED
LED Driver	Constant Current
Lens Type	Frosted
Lumen Maintenance	70% @ 50,000 hrs
Max. Op. Temp.	40°C (104°F)
Min. Start Temp.	-20°C (-4°F)
Material	PC
Voltage	120-347V
Power Factor	>0.99
Warranty	5 Years

Fixture Performance Chart


MODEL NO.	LENGTH	EFFICACY	WATTAGE	DELIVERED LUMENS ¹
LCF-W1-4FT-CCT	4'	>130	29 / 33 / 40	3800 / 4300 / 5200

Technical Drawings

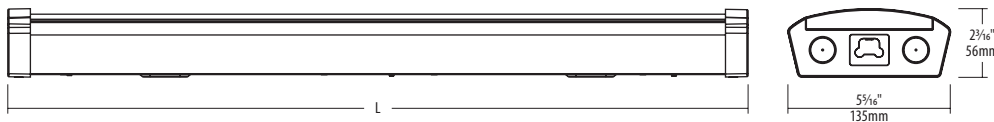

Model No.	Length (L)
LCF-W1-4FT	47 1/8" (1211mm)

Ordering Guide

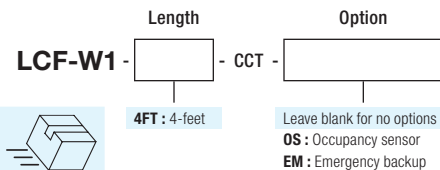

Highlighted option denotes QuickShip.

Notes:
¹ Delivered lumens data is for 3000 K CCT. ² For list of qualified products, visit the DLC website (www.designlights.org). * QuickShip option is available on orders of 100 pieces or less, and will ship within 7 business days. For additional options please consult your A-Line representative. All trademarks are the property of their respective owners.
 Due to our continued efforts to improve our products, product specifications are subject to change without notice.